

WAAS
CH **97617**
W11A

APP CRS
111°

Rwy Ldg
TDZE **871**
Apt Elev **871**

RNAV (GPS) RWY 11

CENTRAL IL RGNL/BLOOMINGTON-NORMAL (BMI)


⚠

⚠

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -1.6°C (4°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. Baro-VNAV and VDP NA when using General Downing-Peoria Intl altimeter setting. When local altimeter setting not received, use General Downing-Peoria Intl setting: increase all DA 116 feet and all MDA 120 feet; increase LPV all Cats visibility ½ mile, LNAV/VNAV all Cats and LNAV Cat C/D visibility ¾ mile, and Circling Cats C/D visibility ¼ mile.

MISSED APPROACH:
Climb to 3100 direct
WAPIX and hold.

ATIS 119.575	SAINT LOUIS APP CON 128.725 256.9	BLOOMINGTON TOWER ★ 124.6 (CTAF) 0 269.575	GND CON 121.65	UNICOM 122.95
------------------------	---	--	--------------------------	-------------------------

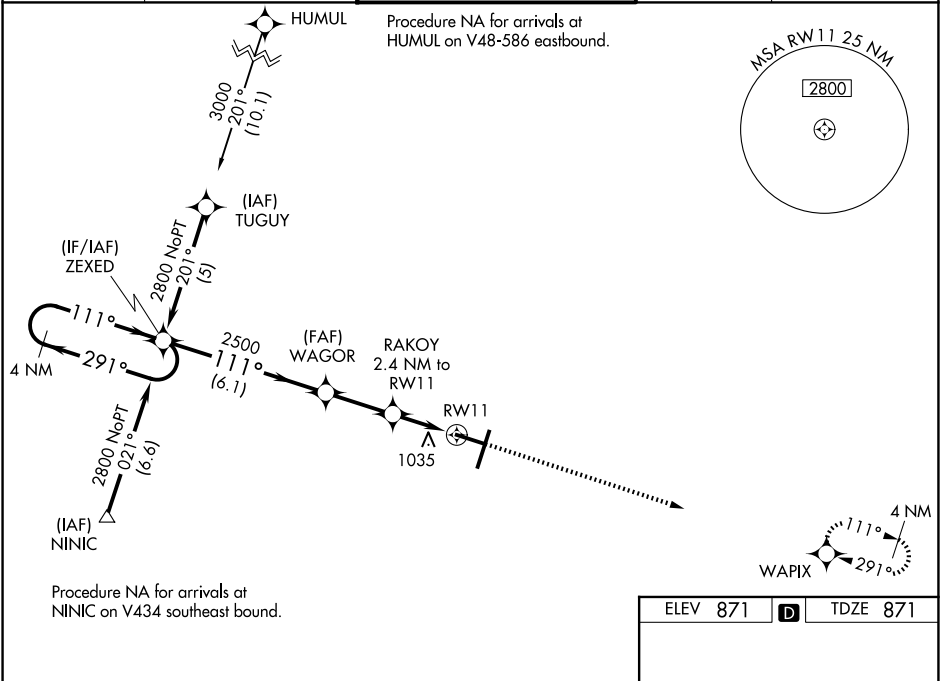

4 NM Holding Pattern ZEXED		3100 WAPIX	111°	ELEV 871 TDZE 871	
2800 ← 291° 111°		WAGOR 2500	RAKOY 2.4 NM to RW11	*LNAV only	
GP 3.00° TCH 43		2500	*1.2 NM to RW11	*1680	
6.1 NM		2.5 NM	1.2 NM	1.2 NM	
CATEGORY	A	B	C	D	
LPV DA	1121-3/4 250 (300-3/4)				
LNAV/VNAV DA	1341-15/8 470 (500-15/8)				
LNAV MDA	1280-1	409 (500-1)	1280-1 1/4	409 (500-1 1/4)	
CIRCLING	1340-1	469 (500-1)	1620-2 1/4 749 (800-2 1/4)	1620-2 1/2 749 (800-2 1/2)	
					TDZ/CL Rwy 20 0 HIRL Rwy 2-20 and 11-29 0