

WAAS CH 99303 W20A	APP CRS 201°	Rwy Ldg TDZE Apt Elev	8000 871 871
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 20

CENTRAL IL RGNL/BLOOMINGTON-NORMAL (BMI)

RNP APCH - GPS.

▼


▲

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -20°C or above 54°C. Baro-VNAV and VDP NA when using PIA altimeter setting. When local altimeter setting not received, use PIA altimeter setting: increase LPV DA to 1187 feet and all visibilities to RVR 2400; increase LNAV/VNAV DA to 1417 feet and all visibilities to RVR 6000; increase all MDAs 120 feet and LNAV visibility Cat C and D to RVR 5500 and Circling visibility Cat C and D ¼ SM. For inop ALS, increase LNAV Cat C and D visibility to RVR 6000. For inop ALS when using PIA altimeter setting, increase LPV all Cats visibility to RVR 4500.

ALS F-2

MISSED APPROACH:
Climb to 1500 then climbing right turn to 3000 direct MCLEN and hold.

ATIS 119.575	SAINT LOUIS APP CON 128.725 256.9	BLOOMINGTON TOWER ★ 124.6 (CTAF) 0 269.575	GND CON 121.65	UNICOM 122.95
------------------------	---	---	--------------------------	-------------------------

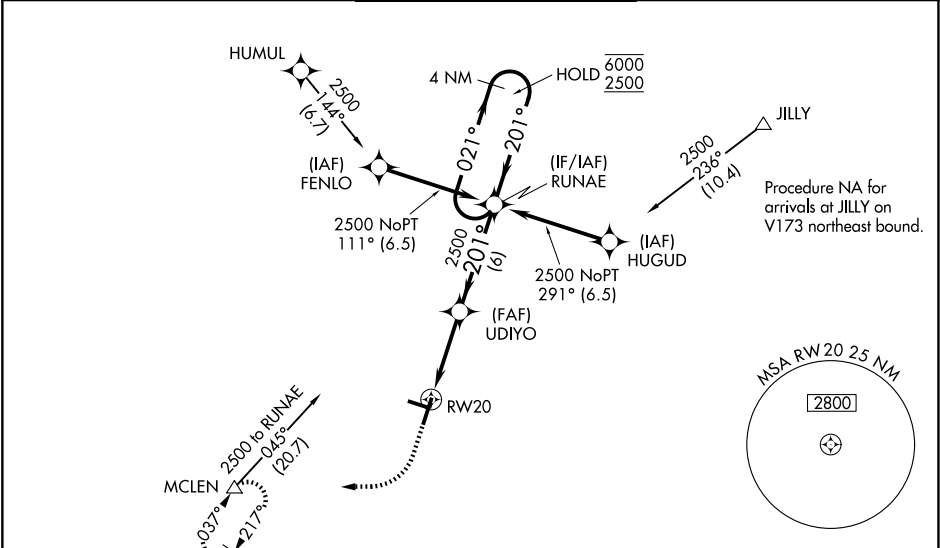

1500		3000	MCLEN				
↑		↷	△				
RW20		1.1 NM to RW20	UDIYO	2500	RUNAE	4 NM Holding Pattern	
				201°	021° → 6000	← 201° 2500	GP 3.00° TCH 58
				2500			
		1.1	3.8 NM	6 NM			
CATEGORY		A	B	C	D		
LPV DA		1071/18		200 (200-½)			
LNAV/VNAV DA		1301/40		430 (500-¾)			
LNAV MDA		1280/24	409 (500-½)		1280/40	409 (500-¾)	
CIRCLING		1340-1	469 (500-1)		1620-2¼ 749 (800-2¼)	1620-2½ 749 (800-2½)	

