

LOC/DME I-MKL 109.1 Chan 28	APP CRS 023°	Rwy Ldg 6005 TDZE 433 Apt Elev 433
---	------------------------	---

ILS or LOC RWY 2
JACKSON RGNL (MKL)





DME required. RADAR required for procedure entry.

MALSR

MISSED APPROACH: Climb to 1000 then climbing left turn to 2200 on heading 230° and MKL VOR/DME R-254 to SKOAL/MKL 12 DME and hold.

▼ Rwy 2 helicopter visibility reduction below ¾ SM NA. For inop ALS, increase S-LOC 2 Cat A/B visibility to 1 SM and Cat C/D visibility 1½ SM.
▲

ASOS 119.325	MEMPHIS CENTER 134.65 316.15	JACKSON TOWER ★ 127.15 (CTAF) 0 249.95	GND CON 120.9	UNICOM 122.95
------------------------	--	--	-------------------------	-------------------------

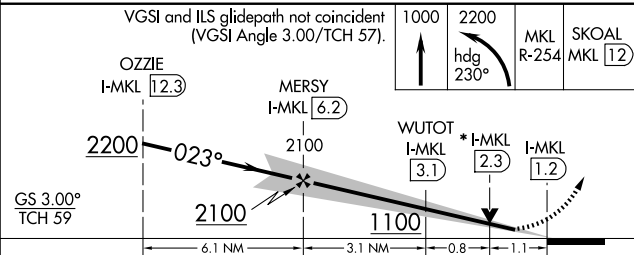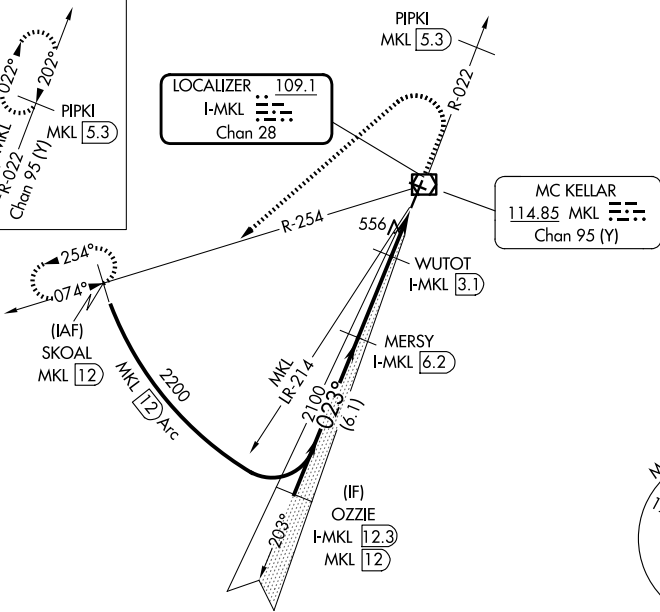

CATEGORY	A	B	C	D
S-ILS 2		770-¾ 337 (400-¾)		
S-LOC 2		820-¾ 387 (400-¾)		
CIRCLING	900-1 467 (500-1)	920-1 487 (500-1)	960-1½ 527 (600-1½)	1100-2 667 (700-2)

