

WAAS CH 40312 W20A	APP CRS 203°	Rwy Ldg 6005 TDZE 418 Apt Elev 433
--	------------------------	---

RNAV (GPS) RWY 20



JACKSON RGNL (MKL)

RNP APCH - GPS

▼ Rwy 20 helicopter visibility reduction below ¾ SM NA. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 48°C. Baro-VNAV NA when using Dyersburg altimeter setting. When local altimeter setting not received, use Dyersburg altimeter setting: increase LPV DA to 802 feet and visibility all Cats ½ SM; increase LNAV/VNAV DA to 910 feet and visibility all Cats ¼ SM; increase all MDA 100 feet and visibility LNAV Cat C and D and Circling Cat C ¼ SM, and Circling Cat D ½ SM.

▲ MISSED APPROACH: Climb to 3000 direct ZIFFO and hold.

ASOS 119.325	MEMPHIS CENTER 134.65 316.15	JACKSON TOWER ★ 127.15 (CTAF) 0 249.95	GND CON 120.9	UNICOM 122.95
------------------------	--	---	-------------------------	-------------------------

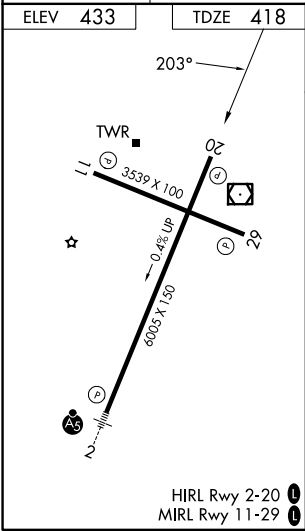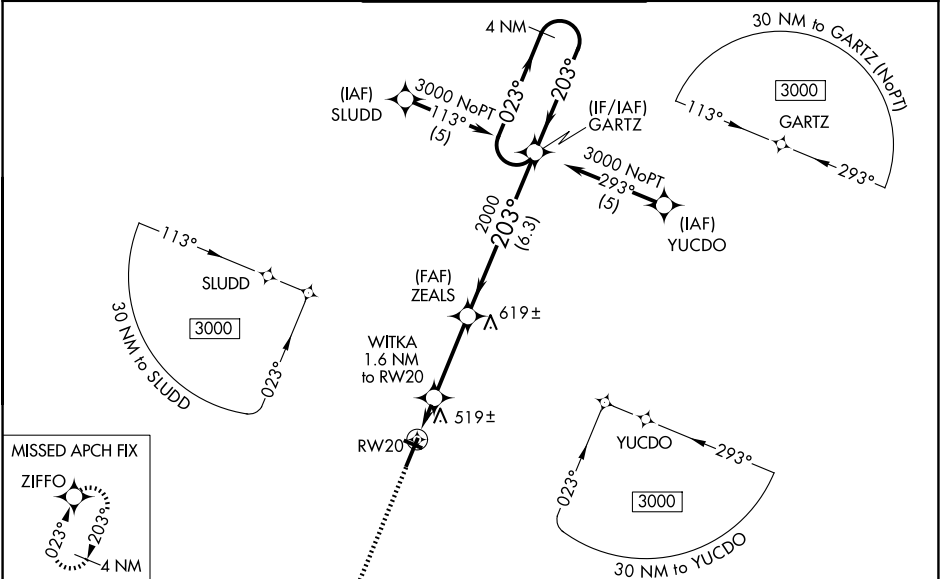

3000	ZIFFO	VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 46).			
* LNAV only	WITKA 1.6 NM to RW20	ZEALS	GARTZ	4 NM Holding Pattern	3000
	RW20	*960	2000		GP 3.00° TCH 50
	1.6 NM	3.2 NM	6.3 NM		
CATEGORY	A	B	C	D	
LPV DA		710-1	292 (300-1)		
LNAV/VNAV DA		818-1½	400 (400-1½)		
LNAV MDA		780-1	362 (400-1)		780-1¼ 362 (400-1¼)
CIRCLING	900-1 467 (500-1)	920-1 487 (500-1)	960-1½ 527 (600-1½)		1100-2 667 (700-2)

SE-1, 02 OCT 2025 to 30 OCT 2025

SE-1, 02 OCT 2025 to 30 OCT 2025