

RNAV (GPS) RWY 19L

APCH CRS 191°	Rwy Idg TDZE Arpt Elev	8000 316 316
------------------	------------------------------	--------------------

(USN)

MERIDIAN NAS (MC CAIN FLD) (KNMM)

RNP APCH.

T * When ALS inop. increase CAT AB vis to 1 mile. increase CAT CDE to 1 3/8 miles.

** When ALS inop, increase CAT AD vis to 1 3/8 miles.



MISSED APPROACH: Climb to 2100 direct RUCKS and hold.


ATIS★
290.525

APP CON
120.5 269.325 S
379.275 N
120.95 276.4 W
121.275 348.7 E

MC CAIN TOWER★
126.2 340.2 RWY 01L, 19L AND 28
126.2 360.2 RWY 01R, 19R AND 10


MC CAIN GND CON
336.4

ASR/PAR

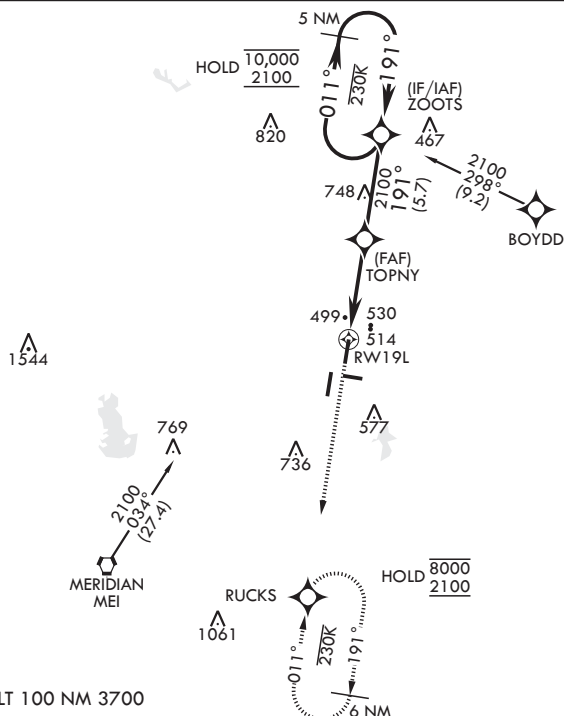



For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 54°C .

EMERG SAFE ALT 100 NM 3700



ELEV 316

TDZE 316

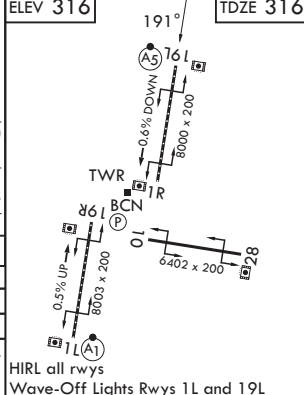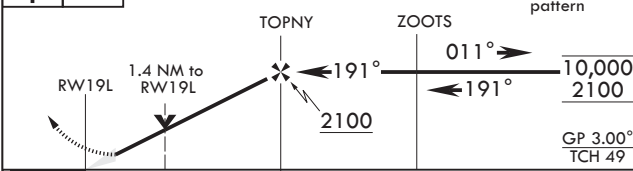

CATEGORY	A	B	C	D	E
LNAV/VNAV DA**	800-1		484 (500-1)		
LNAV MDA*	800-1½	484 (500-1½)	800-1	484	(500-1)
CIRCLING	820-1	840-1	840-1½	880-2	1080-2½
	504	524	524	564	764
	(600-1)	(600-1)	(600-1½)	(600-2)	(800-2½)

Wave-Off Lights Rwy 1L and 19L

MERIDIAN, MISSISSIPPI

32°33'N - 88°33'W

MERIDIAN NAS (MC CAIN FLD) (KNMM)

Amdt 4 08SEP22

RNAV (GPS) RWY 19L

SC-4, 02 OCT 2025 to 30 OCT 2025

SC-4, 02 OCT 2025 to 30 OCT 2025