


WAAS CH 61041 W23A	APP CRS 229°	Rwy Ldg TDZE Apt Elev	5200 15 15
--	------------------------	-----------------------------	---------------------------------------

RNAV (GPS) RWY 23

LAKE CHARLES RGNL (LCH)

RNP APCH - GPS.		MISSED APPROACH: Climb to 1700 direct WINUP and hold.	
For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -2°C or above 54°C. Rwy 23 helicopter visibility reduction below ¾ SM NA.			
ATIS 118.75	LAKE CHARLES APP CON★ 119.35 353.75	LAKE CHARLES TOWER★ 120.7 (CTAF) 257.8	GND CON 121.8
		UNICOM 122.95	

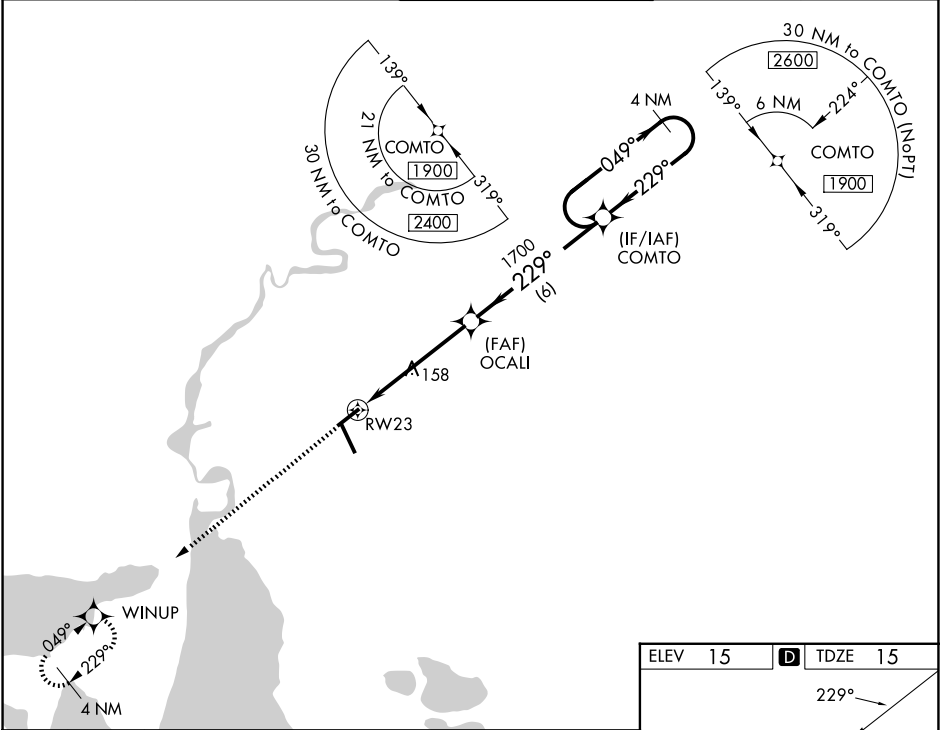

1700 WINUP		OCALI 1700		COMTO 4 NM Holding Pattern	
1.1 NM to RWY 23		1.1		4 NM	
RWY 23		1700		GP 3.00° TCH 47	
CATEGORY	A	B	C	D	
LPV DA	265-¾		250 (300-¾)		
LNAV/VNAV DA	301-⅞		286 (300-⅞)		
LNAV MDA	420-1 405 (500-1)		420-1½ 405 (500-1½)		
CIRCLING	440-1 425 (500-1)		480-1 565 (600-1½)		680-2 665 (700-2)

