

RNAV (GPS) RWY 30

WINONA MUNI/MAX CONRAD FLD (ONA)

WAAS CH 40329 W30A	APP CRS 300°	Rwy Idg 5199 TDZE 656 Apt Elev 656
--	------------------------	---

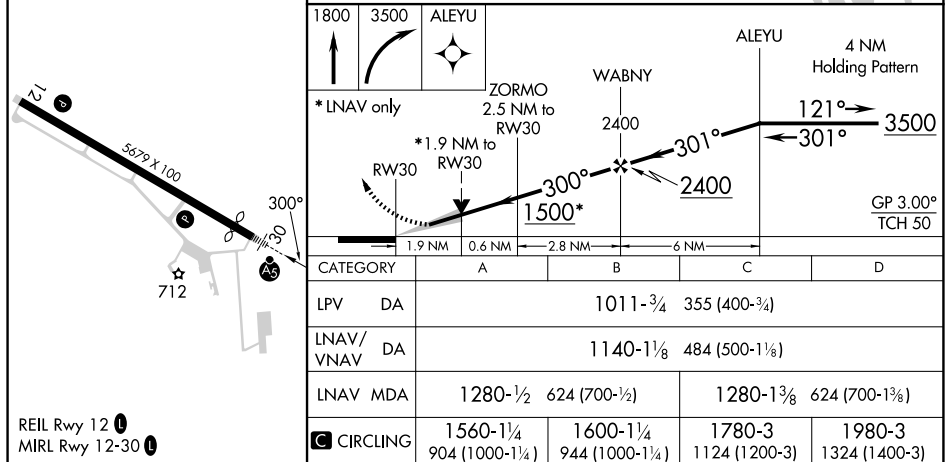
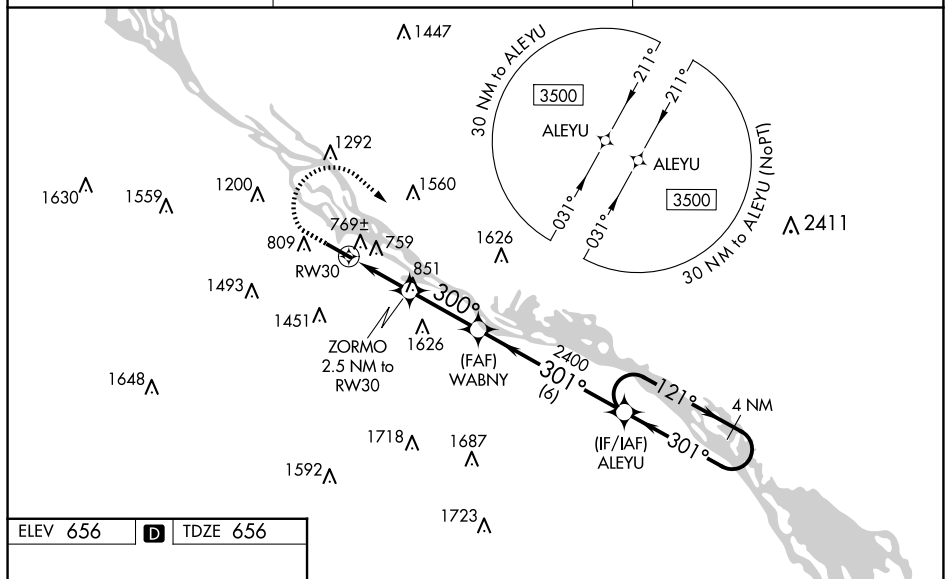
  -29°C	For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C (4°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. When local altimeter setting not received, use the Crossse altimeter setting and increase all LPV DA to 1064 feet and visibility 1/8 mile all Cats, all LNAV/VNAV DA to 1193 and visibility 1/8 mile all Cats, and all MDA 60 feet, increase LNAV Cat C/D and Circling Cat B visibility 1/4 mile. For inop ALS, increase LPV all Cts visibility to 1 1/8 mile. For inop ALS when using the Crossse altimeter setting, increase LPV all Cts visibility to 1 3/8 mile, and LNAV Cts C/D visibility to 2 mile. Baro-VNAV and VDP NA when using the Crossse altimeter setting.
--	---

MALSR
A5

MISSED APPROACH:
Climb to 1800 then
climbing right turn to
3500 direct ALEYU and
hold.

AWOS-3
118.075

MINNEAPOLIS CENTER
128.6 363.0

UNICOM
122.8 (CTAF) **L**

WINONA, MINNESOTA
Amdt 2A 22JUN17

44°05'N-91°43'W

WINONA MUNI/MAX CONRAD FLD (ONA)

RNAV (GPS) RWY 30