

WAAS CH 99499 W33A	APP CRS 327°	Rwy Idg 5510 TDZE 1153 Apt Elev 1160
--	------------------------	---

RNAV (GPS) RWY 33

WAYNESVILLE-ST ROBERT RGNL FORNEY FLD (TBN)

RNP APCH - GPS.


- T** For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 54°C. When local altimeter setting not received, use Rollo Ntl altimeter setting and increase LPV DA to 1472 feet, increase LNAV/VNAV DA to 1521 feet and all MDAs 80 feet. Increase LNAV Cat C/D visibility to RVR 6000. Inop table does not apply to LPV all Cats, LNAV/VNAV all Cats, and LNAV Cats A/B. For inop ALS increase LNAV Cats C/D visibility to RVR 6000. VDP and Baro-VNAV NA when using Rollo Ntl altimeter setting. Circling NA west of Rwy 15-33. Rwy 33 helicopter visibility reduction below ¾ SM NA. Inop table does not apply to LPV all Cats, LNAV/VNAV all Cats, and LNAV Cats A/B when using Rollo Ntl altimeter setting.

MALS


MISSED APPROACH.
Climb to 3100 direct
PIMEW and hold.

D-ATIS 118.7 229.4	KANSAS CITY CENTER 128.35 284.675	FORNEY TOWER ★ 125.4 (CTAF) 0 268.7	GND CON 123.75 256.8
------------------------------	---	---	--------------------------------

MISSED APCH FIX

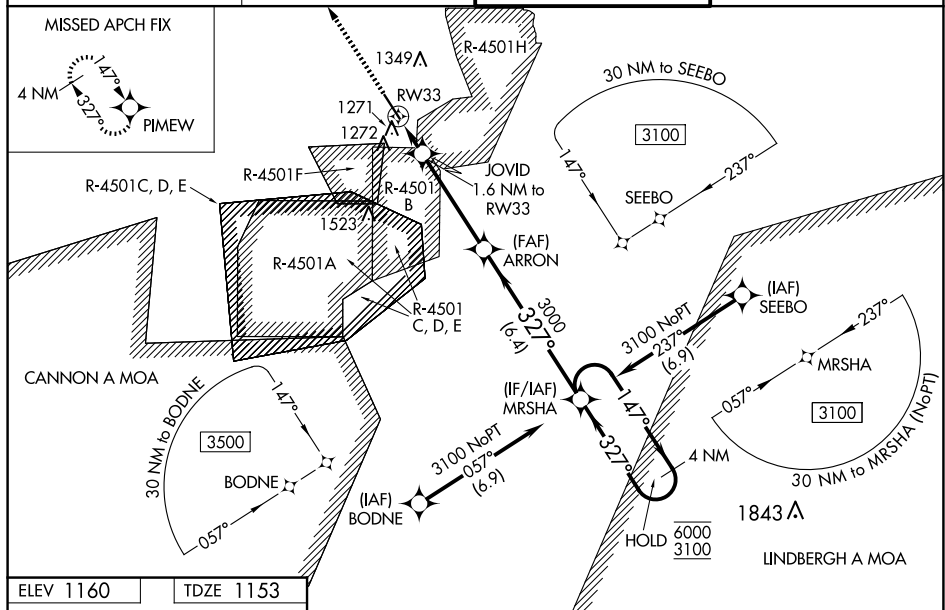

ELEV 1160		TDZE 1153
-----------	--	-----------

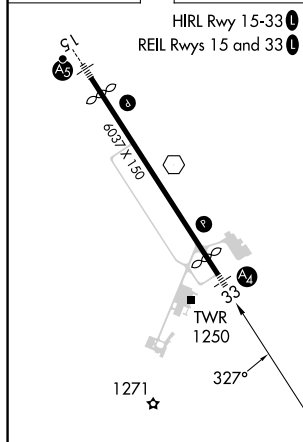

3100 ↑ PMEW 		JOYD 1.6 NM to RW33 ARRON 3000 MRSHA 4 NM Holding Pattern 147° → 6000 ← 327° 3100 1.1 NM to RW33 1700 3000 GP 3.00° TCH 36			
1.1 NM 0.5 NM 4.1 NM 6.4 NM					
CATEGORY		A	B	C	D
LPV DA		1403/50 250 (300-1)			
LNAV/ VNAV		1452/50 299 (300-1)			
LNAV MDA		1540/50 387 (400-1)			
CIRCLING		1580-1 420 (500-1)	1660-1 500 (500-1)	1660-1½ 500 (500-1½)	1720-2 560 (600-2)