


APP CRS 191°	Rwy Idg 11500 TDZE 302 Apt Elev 312
------------------------	--

RNAV (RNP) Z RWY 19L
WASHINGTON DULLES INTL (IAD)

RNP AR APCH - GPS.		ALSF-2 	MISSED APPROACH: Climb to 800 then climbing left turn to 3000 direct ASPER and hold.	
▼ For uncompensated Baro-VNAV systems, procedure NA below -13°C or above 54°C. Simultaneous approach authorized. For Inp ALS, increase RNP 0.11 all Cats visibility to RVR 4500.				
POTOMAC APP CON 120.45 306.925 (241°-330°) 128.525 306.925 (091°-240°) 126.1 338.25 (031°-090°)		DULLES TOWER 120.1 317.8 (Rwy 1R/19L) 120.25 348.6 (Rwy 1C/19C) 134.425 348.6 (Rwys 1L/19R and 12/30)		GND CON 121.9 317.8 (EAST) 121.625 348.6 (WEST)
				CLNC DEL 135.7 317.8

D-ATIS 134.85	6000 097° (3.7) 6000 (IAF) LEMIU 7000	CPDLC
-------------------------	--	-------

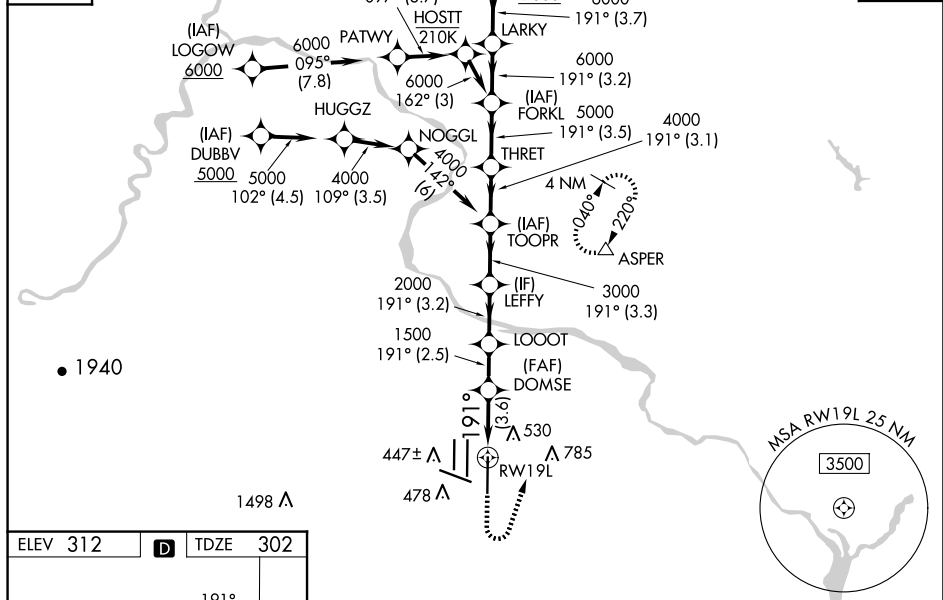

CATEGORY	A	B	C	D
RNP 0.11 DA	620/24	318 (400-1/2)		
RNP 0.15 DA	684/35	382 (400-3/4)		
RNP 0.30 DA	730/40	428 (500-3/4)		

AUTHORIZATION REQUIRED