


WAAS CH 56409 W01A	APP CRS 011°	Rwy ldg 11500 TDZE 312 Apt Elev 312
--	------------------------	--


RNAV (GPS) Y RWY 1R
WASHINGTON DULLES INTL (IAD)

RNP APCH - GPS. ▼ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -13°C or above 54°C. ▲ Simultaneous approach authorized. LNAV procedure NA during simultaneous operations. Use of FD or AP required during simultaneous operations. For inop ALS, increase LNAV/VNAV all Cats visibility to RVR 6000 and LNAV Cat C/D visibility to 1½ SM.	ALSf-2 ▲	MISSED APPROACH: Climb to 780, then climbing right turn to 3000 direct JCOBY and hold.
---	-------------	---

POTOMAC APP CON 120.45 306.925 (241°-330°) 128.525 306.925 (091°-240°) 126.1 338.25 (331°-090°)	DULLES TOWER 120.1 317.8 (Rwy 1R/19L) 120.25 348.6 (Rwy 1C/19C) 134.425 348.6 (Rwys 1L/19R and 12/30)	GND CON 121.9 317.8 (EAST) 121.625 348.6 (WEST)	CLNC DEL 135.7 317.8
---	---	---	--------------------------------

D-ATIS 134.85	CPDLC
-------------------------	-------

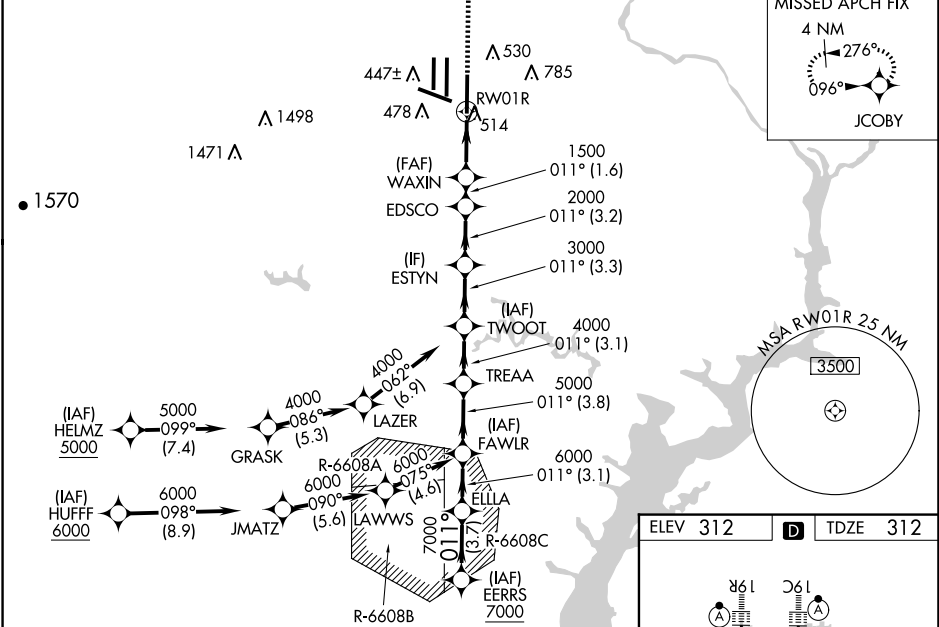

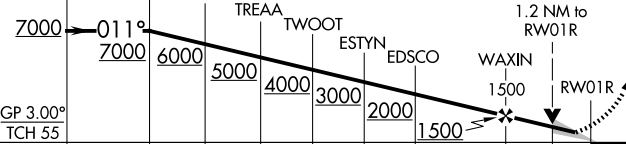VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 72).																	
																	
GP 3.00° TCH 55																	
← 3.7 NM →		← 3.1 NM →		← 3.8 NM →		← 3.1 NM →		← 3.3 NM →		← 3.2 NM →		← 1.6 NM →		← 2.3 NM →		← 1.2 NM →	
CATEGORY		A		B		C		D									
LPV DA		512/18 200 (200-½)															
LNAV/ VNAV DA		728/40 416 (500-¾)															
LNAV MDA		780/24 468 (500-½)				780/50 468 (500-1)											
CIRCLING		940-1 628 (700-1)				940-1¾ 628 (700-1¾)				1180-2¾ 868 (900-2¾)							

