LOC/DME I-ROF	APP CRS	Rwy Ldg	5503
111.15	328°	TDZE	705
Chan 48 (Y)		Apt Elev	712

LOC RWY 33

AURORA MUNI (ARR)

For inop ALS, increase S-LOC 33 Cats C and D visibility to 1¾ SM and EPABE FIX minimums S-LOC 33 Cats C and D visibility to 1 SM.

MALSR

MISSED APPROACH: Climb to 1400 then climbing right turn to 3000 on heading 146° and JOT VOR/DME R-347 to VAINS INT/JOT 13 DME and hold, continue climb-in-hold to 3000.

ATIS	CHICAGO APP CON	AURORA TOWER★	GND CON
125.85	133.5 349.0	120.6 (CTAF) L	121.7

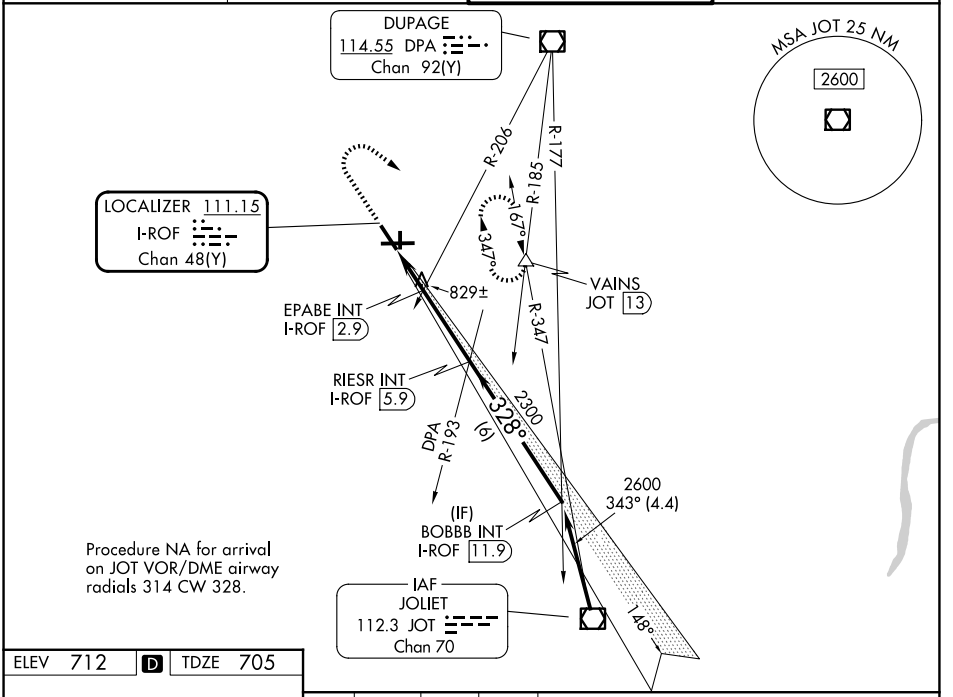

ELEV 712 D TDZE 705



HIRL Rwys 15-33 and 9-27 L
MIRL Rwys 18-36 L
REIL Rwys 15, 18, 27, and 36 L

FAF to MAP 4.8 NM

Knots	60	90	120	150	180
Min:Sec	4:48	3:12	2:24	1:55	1:36

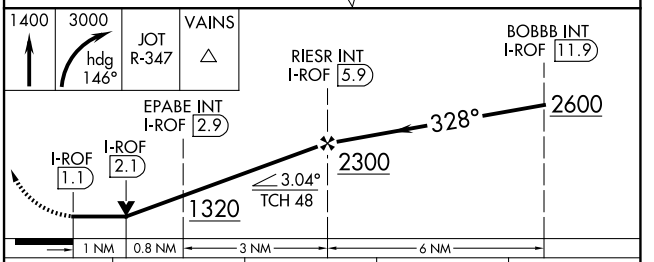

CATEGORY	A	B	C	D
S-LOC 33	1320-½ 615 (700-½)		1320-1⅜ 615 (700-1⅜)	
CIRCLING	1320-1 608 (700-1)		1320-1¾ 608 (700-1¾)	1320-2 608 (700-2)
EPABE FIX MINIMUMS (DUAL VOR RECEIVERS or DME REQUIRED)				
S-LOC 33	1080-½ 375 (400-½)		1080-⅝ 375 (400-⅝)	
CIRCLING	1200-1 488 (500-1)		1300-1½ 588 (600-1½)	1320-2 608 (700-2)

EC-3, 02 OCT 2025 to 30 OCT 2025
EC-3, 02 OCT 2025 to 30 OCT 2025