


RNP APCH - GPS.			MALSR AS 	MISSED APPROACH: Climb to 2500 direct HOGIE and hold.
▼ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -20°C or above 54°C. For inop ALS, increase LNAV Cat C/D visibility to 1½ SM.				
ATIS 125.85	CHICAGO APP CON 133.5 349.0	AURORA TOWER ★ 120.6 (CTAF) 0	GND CON 121.7	

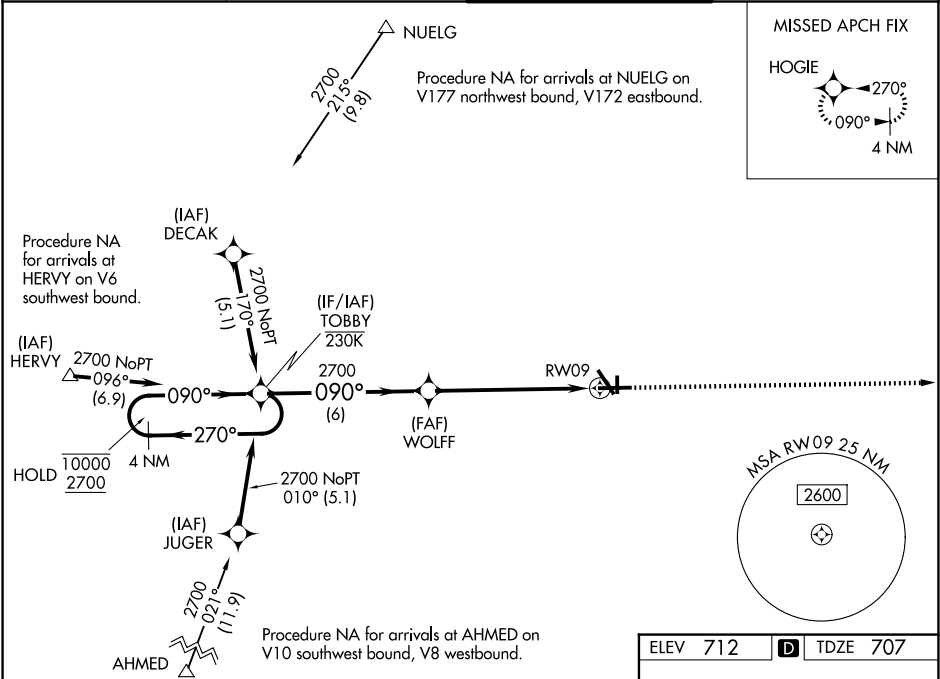

4 NM Holding Pattern		TOBBY		WOLFF		2500 HOGIE	
10000 2700		GP 3.00° TCH 45		*1.5 NM to RW09		*LNAV only.	
← 270°		090° →		2700		RW09	
6 NM		4.6 NM		1.5 NM			
CATEGORY	A	B	C	D			
LPV DA	957-½		250 (300-½)				
LNAV/VNAV DA	1035-½		328 (400-½)				
LNAV MDA	1220-½ 513 (600-½)		1220-1 513 (600-1)				
CIRCLING	1220-1 508 (600-1)		1300-1½ 588 (600-1½)		1320-2 608 (700-2)		

ELEV 712

TDZE 707

6501

33

36

81

3198 X 75

5503 X 100

27

090°

TWR

AS

AS

MIRL Rwy 18-36 0
HIRL Rwy 15-33 and 9-27 0
REIL Rwy 15, 18, 27, and 36 0