

WAAS	APP CRS	Rwy Ldg	10702
CH 65817	334°	TDZE	17
W33A		Apt Elev	17

RNAV (GPS) RWY 33

CHENNAULT INTL (CWF')

RNP APCH - GPS.

▼

Baro-VNAV and VDP NA when using Lake Charles Rgnl altimeter setting.

⚠



For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 54°C.

ASR

When local altimeter setting not received, use Lake Charles Rgnl altimeter setting and increase LPV DA to 233 feet; increase LNAV/VNAV DA to 510 feet and all visibilities ½ SM. Increase all MDAs 20 feet and LNAV visibility Cat C/D ½ SM.

MISSED APPROACH: Climb to 2000 direct CEVKU and hold.

ATIS	LAKE CHARLES APP CON ★	CHENNAULT TOWER ★	GND CON	UNICOM
120.0	119.8 282.3	124.2 (CTAF) 0 290.4	121.65 275.8	122.95

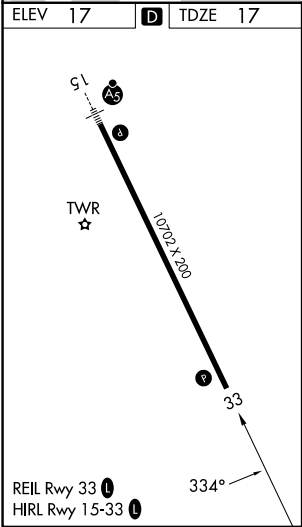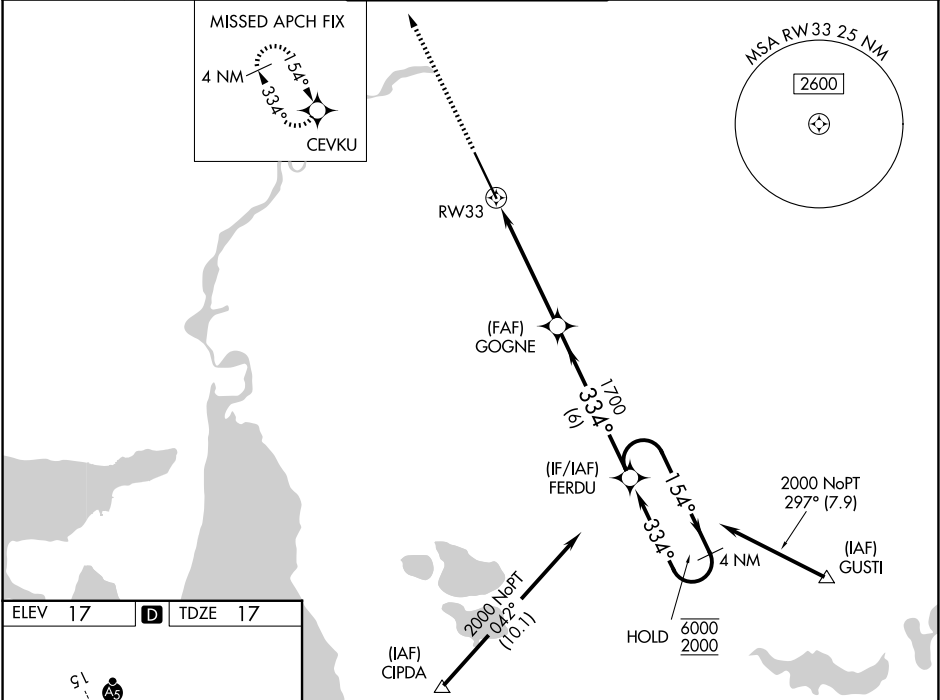

2000	CEVKU				
CATEGORY	A	B	C	D	
LPV DA	217-¾ 200 (200-¾)				
LNAV/VNAV DA	494-1¾ 477 (500-1¾)				
LNAV MDA	580-1 563 (600-1)		580-1½ 563 (600-1½)		
CIRCLING	640-1 623 (700-1)		640-1¾ 740-2¼ 623 (700-1¾) 723 (800-2¼)		

SC-4, 02 OCT 2025 to 30 OCT 2025

SC-4, 02 OCT 2025 to 30 OCT 2025