

WAAS
CH **63139**
W11A

APP CRS
111°

Rwy Ldg
TDZE
775
Apt Elev
777

RNAV (GPS) RWY 11


AUBURN UNIVERSITY RGNL (AUO)

RNP APCH - GPS.

Baro-VNAV and VDP NA when using CSG altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 54°C. Circling Rwy 29 NA at night. When local altimeter setting not received, use CSG altimeter setting: increase LPV DA to 1139 feet; increase LNAV/VNAV DA to 1334 feet and all visibilities ¼ SM. Increase all MDAs 120 feet and LNAV visibility Cats C/D ¼ SM and Circling Cat C/D visibility ½ SM.

MISSED APPROACH:
Climb to 1300 then climbing right turn to 3000 direct HESEL and hold.

AWOS-3PT 132.575	ATLANTA APP CON ★ 125.5 323.1	AUBURN TOWER ★ 123.875 (CTAF) 0	GND CON ★ 121.625	UNICOM 123.0
----------------------------	---	---	-----------------------------	------------------------

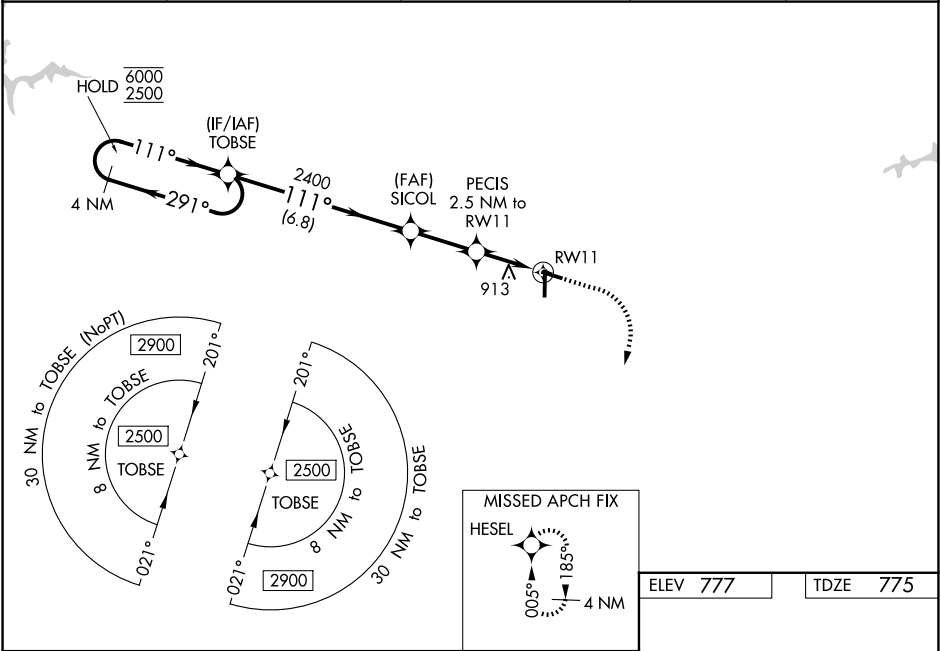

4 NM Holding Pattern

GP 3.00° TCH 45

TOBSE

SICOL

PECIS 2.5 NM to RW11

1.3 NM to RW11

RW11

6.8 NM

2.5 NM

1.3 NM

1.3 NM

CATEGORY	A	B	C	D
LPV DA	1025-1 250 (300-1)			
LNAV/VNAV DA	1220-1 3/8 445 (500-1 3/8)			
LNAV MDA	1220-1	445 (500-1)	1220-1 3/8	445 (500-1 3/8)
CIRCLING	1280-1 503 (600-1)	1360-1 583 (600-1)	1380-1 3/4 603 (700-1 3/4)	1440-2 663 (800-2)

ELEV 777 TDZE 775

111°

81

4000 X 75

5264 X 100

0.9% UP

36

36

36

HIRL Rwy 18-36 0

MIRL Rwy 11-29 0