

WAAS CH 78029 W18A	APP CRS 185°	Rwy Ldg 5264 TDZE 777 Apt Elev 777
--	------------------------	---



RNAV (GPS) RWY 18

AUBURN UNIVERSITY RGNL (AUO)

▼ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C (4°F) or above 54°C (130°F).
▲ Baro-VNAV and VDP NA when using Columbus altimeter setting. DME/DME RNP-0.3 NA. Rwy 18 helicopter visibility reduction below ¾ SM not authorized. When local altimeter setting not received, use Columbus altimeter setting: increase LPV DA to 1140 feet and visibility all Cats ½ SM; increase LNAV/VNAV DA to 1164 feet and visibility all Cats ¾ SM; increase all MDA 120 feet and LNAV Cats C/D visibility ¾ SM, Circling Cat C visibility ¼ SM, and circling Cat D visibility ½ SM.

MISSED APPROACH:
Climb to 3000 direct
HESEL and hold.

AWOS-3PT 132.575	ATLANTA APP CON ★ 125.5 323.1	AUBURN TOWER ★ 123.875 (CTAF) 0	GND CON ★ 121.625	UNICOM 123.0
----------------------------	---	--	-----------------------------	------------------------

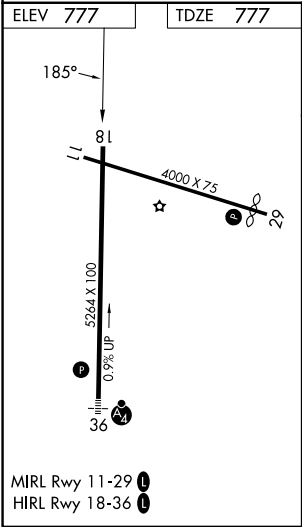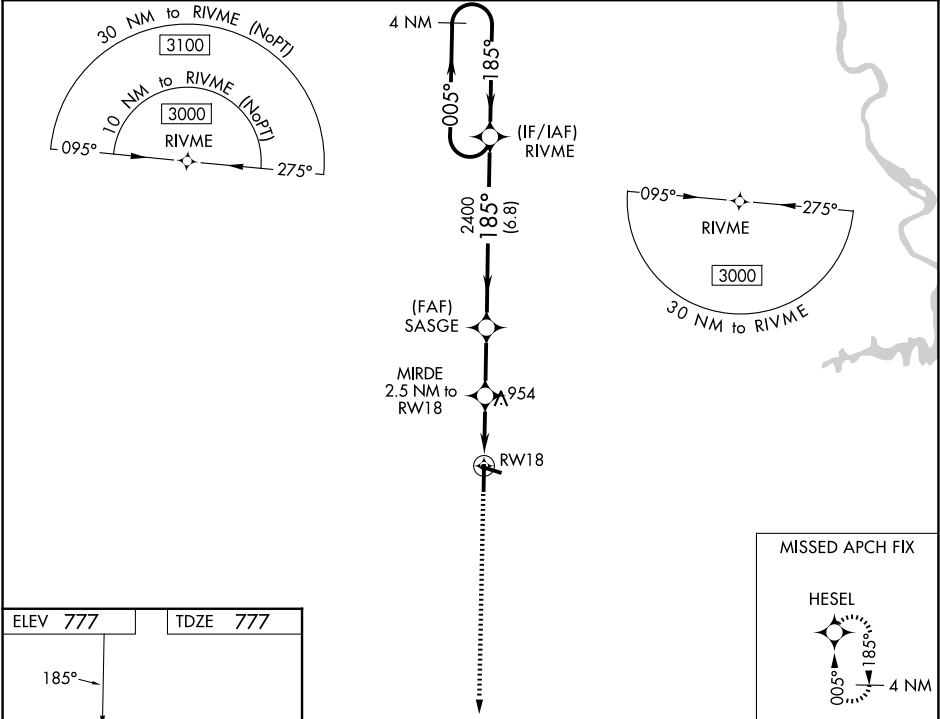

3000	HESEL	MIRDE 2.5 NM to RW18	SASGE 2400	RIVME 4 NM Holding Pattern	005° → 3000	← 185°
*LNAV only	*1.4 NM to RW18	1.4 NM	1.1 NM	2.4 NM	6.8 NM	GP 3.00° TCH 50
CATEGORY	A	B	C	D		
LPV DA	1027-¾	250 (300-¾)				
LNAV/VNAV DA	1051-⅞	274 (300-⅞)				
LNAV MDA	1260-1	483 (500-1)	1260-1⅜	483 (500-1⅜)		
CIRCLING	1280-1	583 (600-1)	1380-1¾	603 (700-1¾)	1480-2¼	703 (800-2¼)