

WAAS CH 50511 W28A	APP CRS 276°	Rwy Idg TDZE Apt Elev	6000 975 975
--	------------------------	-----------------------------	---


RNAV (GPS) RWY 28

LIMA ALLEN COUNTY (AOH)


Baro-VNAV NA when using Findlay altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C (4°F) or above 37°C (98°F). When local altimeter setting not received, use Findlay altimeter setting and increase LPV DA to 1255, LNAV/VNAV DA to 1477 and all MDAs 80 feet; increase LPV all Cats visibility ½ SM, LNAV/VNAV all Cats, LNAV Cats C/D and Circling Cats C/D ¼ SM. DME/DME RNP-0.3 NA. VDP NA with Findlay altimeter setting.

MISSED APPROACH:
Climb to 3000 direct UCAYU and hold.

ASOS 128.725	COLUMBUS APP CON 121.825 323.15	UNICOM 122.7 (CTAF) 0
------------------------	---	---------------------------------

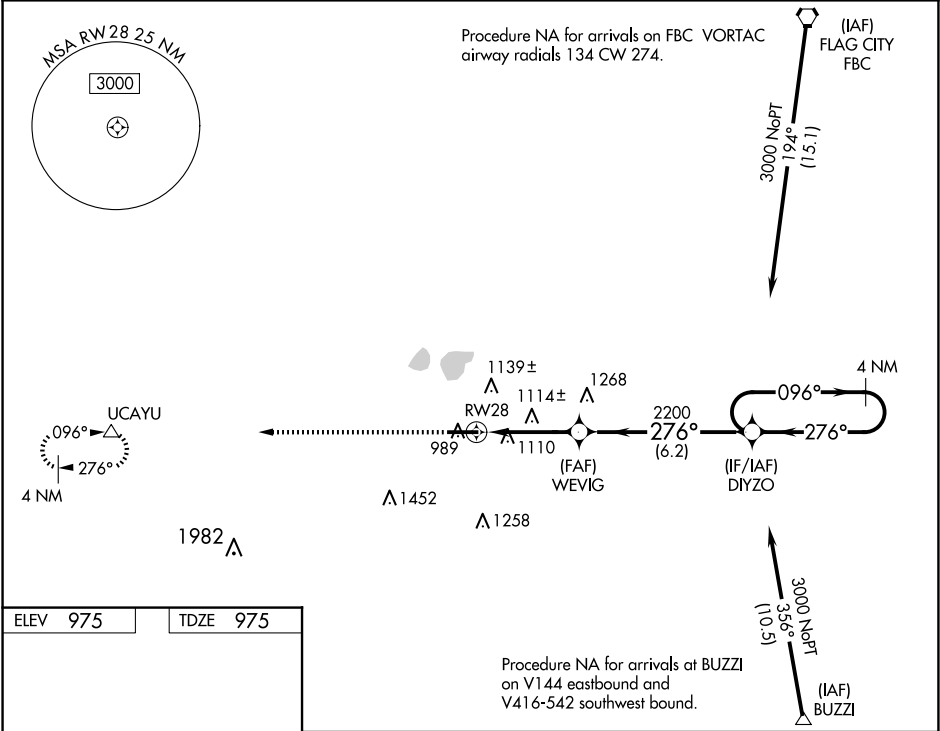

ELEV 975	TDZE 975
----------	----------

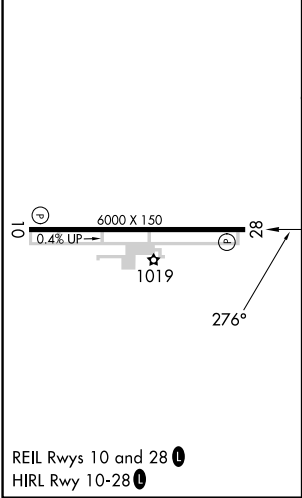

3000	UCAYU	WEVIG	DIYZO	4 NM Holding Pattern
*LNAV only	*1.1 NM to RW28	2200	276°	096° 3000
1.1 NM	2.6 NM	6.2 NM	GP 3.00° TCH 49	
CATEGORY	A	B	C	D
LPV DA		1175-¾	200 (200-¾)	
LNAV/VNAV DA		1397-1¾	422 (500-1¾)	
LNAV MDA	1380-1	405 (500-1)	1380-1½	405 (500-1½)
CIRCLING	1420-1 445 (500-1)	1440-1 465 (500-1)	1540-1½ 565 (600-1½)	1820-2¾ 845 (900-2¾)