



WAAS CH 82625 W18A	APP CRS 177°	Rwy Idg 5904 TDZE 3125 Apt Elev 3125	RNAV (GPS) RWY 18 GUYMON MUNI (GUY)
--	------------------------	---	---

⚠ Baro-VNAV NA when using Liberal altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -21°C (-5°F) or above 54°C (130°F). Circling NA east of Rwy 18-36. DME/DME RNP-0.3 NA. When local altimeter setting not received, use Liberal altimeter setting: Increase LPV DA to 3488 feet; increase LNAV/VNAV DA to 3564 feet and all visibilities ½ SM; increase all MDAs 120 feet and visibility Cat C ½ SM. Circling NA to Rwy 6 and 24.

ODALS

MISSED APPROACH:
Climb to 6000 direct
BEAKY and hold.

ASOS 119.925	KANSAS CITY CENTER 134.0 257.625	UNICOM 122.7 (CTAF) 0
------------------------	--	---------------------------------

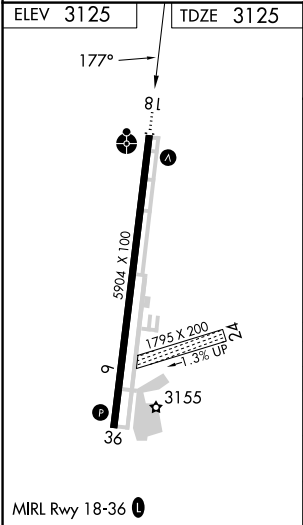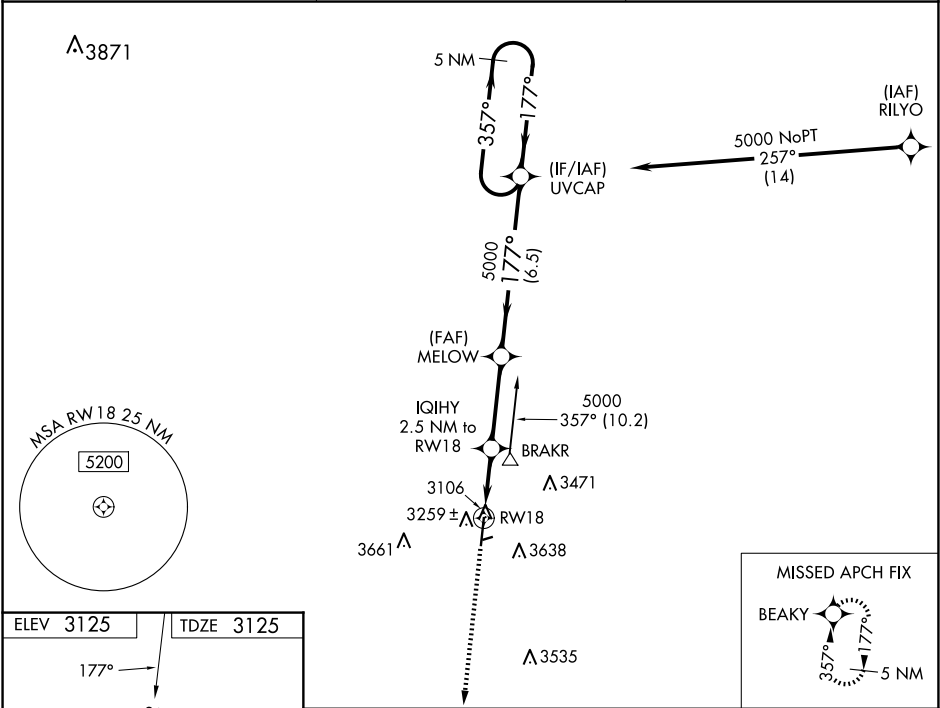

6000	BEAKY	VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 25).			
*LNAV only		MELOW	UVCAP	5 NM Holding Pattern	
IQIHY 2.5 NM to RW18		5000	177°	357°	5000
RW18		*3940	5000	GP 3.00°	TCH 45
→ 2.5 NM		→ 3.3 NM	→ 6.5 NM		
CATEGORY	A	B	C	D	
LPV DA	3375-1	250 (300-1)		NA	
LNAV/VNAV DA	3451-1	326 (400-1)		NA	
LNAV MDA	3520-1	395 (400-1)		NA	
CIRCLING	3580-1	455 (500-1)	3980-2½ 855 (900-2½)	NA	

SC-1, 02 OCT 2025 to 30 OCT 2025

SC-1, 02 OCT 2025 to 30 OCT 2025