

LOC/DME I-SWO 109.15 Chan 28 (Y)	APP CRS 175°	Rwy Idg TDZE Apt Elev	7401 1000 1000
--	------------------------	-----------------------------	---

ILS or LOC RWY 17
STILLWATER RGNL (SWO)


ADF required.

⚠ VDP NA when using Ponca City altimeter setting. When local altimeter setting not received, use Ponca City altimeter setting and increase S-ILS 17 DA to 1280 feet; increase all MDAs 80 feet and S-LOC 17 visibility Cats C/D ½ SM, and increase Circling Cat C visibility ½ SM and Cat D visibility ½ SM. For inop ALS when using Ponca City altimeter setting, increase S-ILS 17 all Cats visibility to ¾ SM.

MALSR
A5

MISSED APPROACH:
Climb to 1500 then climbing right turn to 3200 direct GABEH LOM and hold, continue climb-in-hold to 3200.

ASOS 135.725	KANSAS CITY CENTER 127.8 319.1	STILLWATER TOWER ★ 125.35 (CTAF) 0	GND CON 121.6	UNICOM 122.95
------------------------	--	---	-------------------------	-------------------------

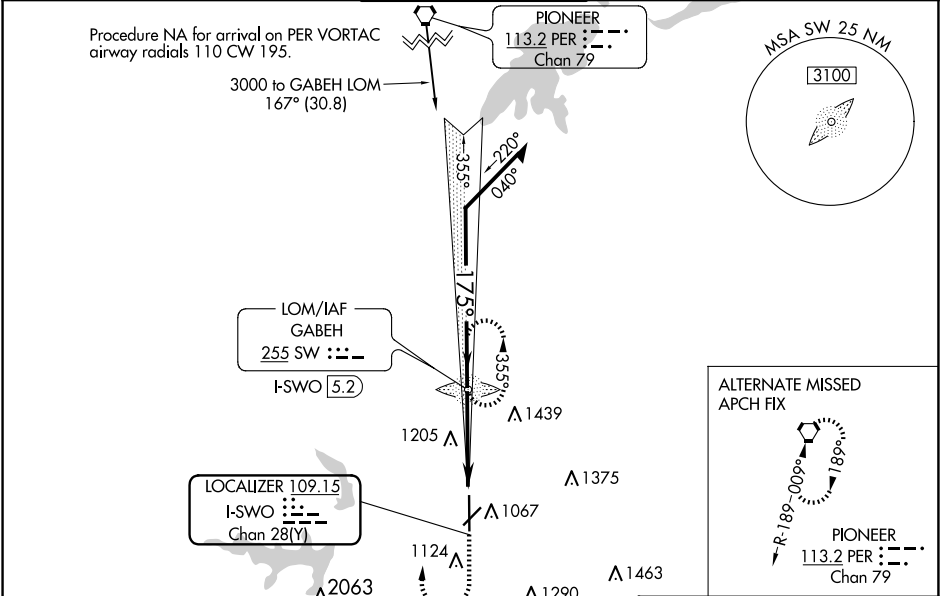

VGSI and ILS glidepath not coincident (VGSI Angle 3.00/TCH 50).

Remain within 10 NM

GABEH LOM I-SWO 5.2

GS 3.00° TCH 42

2600, 2300, 2260

2.5 NM, 1.3

I-SWO 2.7, I-SWO 1.4

1500	3200	SW
------	------	----

ELEV 1000	D	TDZE 1000
174°		
A5		
7401 X 100		
5002 X 75		
0.5% UP		
0.5% UP		
35		
TWR 1018		

CATEGORY	A	B	C	D
S-ILS 17	1200-1½		200 (200-½)	
S-LOC 17	1460-½	460 (500-½)	1460-¾	460 (500-¾)
CIRCLING	1460-1 460 (500-1)	1480-1 480 (500-1)	1540-1½ 540 (600-½)	1740-2¼ 740 (800-2¼)

REIL Rwy 35 0

MIRL Rwy 4-22 and 17-35 0

FAF to MAP 3.8 NM

Knots	60	90	120	150	180
Min:Sec	3:48	2:32	1:54	1:31	1:16

SC-1, 02 OCT 2025 to 30 OCT 2025

SC-1, 02 OCT 2025 to 30 OCT 2025