

|                                                         |                        |                                                     |
|---------------------------------------------------------|------------------------|-----------------------------------------------------|
| LOC/DME I- <b>LER</b><br><b>109.7</b><br>Chan <b>34</b> | APP CRS<br><b>340°</b> | Rwy Ldg<br>TDZE <b>1232</b><br>Apt Elev <b>1232</b> |
|---------------------------------------------------------|------------------------|-----------------------------------------------------|

ILS or LOC/DME RWY 34

BRainerd Lakes RGNL (BRD)

RNP APCH-GPS, from GOLLF.  
DME required. ADF required.



VDP NA with Aitkin altimeter setting. When local altimeter setting not received, use Aitkin altimeter setting: increase all DA to 1484; increase all MDAs 60 feet and visibility S-LOC 34 Cat C/D ¼ SM and visibility Circling Cat D ¼ SM.

NA

MALSR

MISSED APPROACH: Climb to 1700 then climbing right turn to 4000 direct BR LOM, continue climb-in-hold to 4000.

|                        |                                           |                                |
|------------------------|-------------------------------------------|--------------------------------|
| ASOS<br><b>126.775</b> | MINNEAPOLIS CENTER<br><b>118.05 239.0</b> | UNICOM<br><b>122.7(CTAF) 0</b> |
|------------------------|-------------------------------------------|--------------------------------|

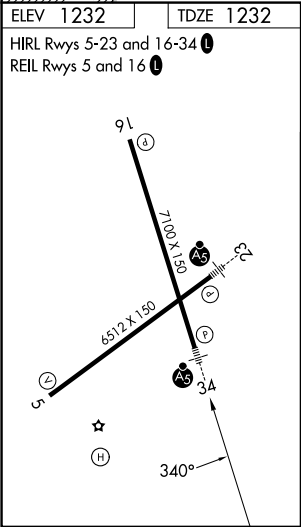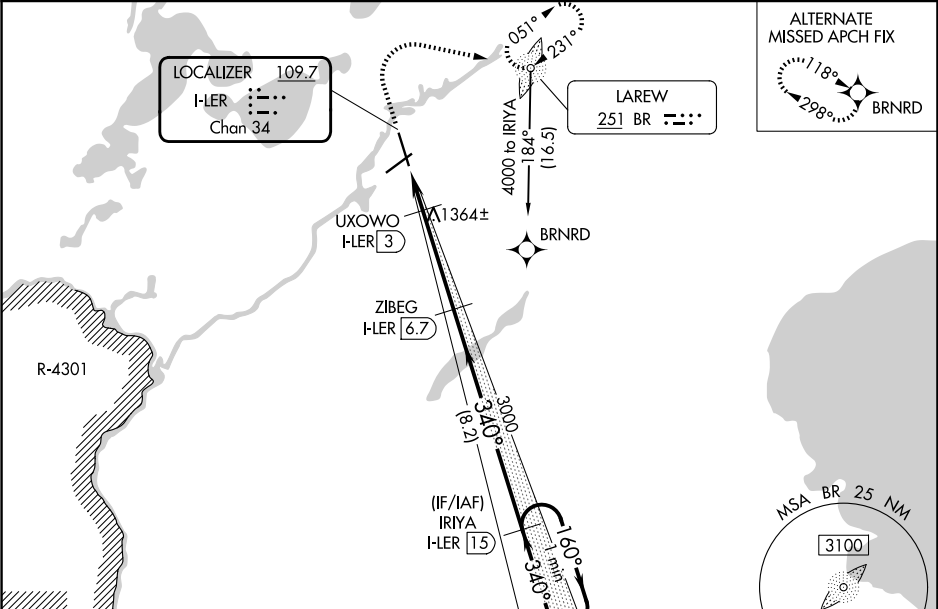

|                   |                       |             |                        |                            |
|-------------------|-----------------------|-------------|------------------------|----------------------------|
| 1700              | 4000                  | BR          | IRIYA I- <b>LER</b> 15 | One Minute Holding Pattern |
| *LOC only         | UXOWO I- <b>LER</b> 3 | 3000        | 160°                   | 4000                       |
| I- <b>LER</b> 1.3 | *I- <b>LER</b> 2.4    | 1820*       | 340°                   | 3000                       |
| 1.1 NM            | 0.6                   | 3.7 NM      | 8.2 NM                 | GS 3.00° TCH 46            |
| CATEGORY          | A                     | B           | C                      | D                          |
| S-ILS 34          | 1432-½                | 200 (200-½) |                        |                            |
| S-LOC 34          | 1620-½                | 388 (400-½) | 1620-⅝                 | 388 (400-⅝)                |
| CIRCLING          | 1760-1                | 528 (600-1) | 1760-1½                | 1860-2                     |
|                   |                       |             | 528 (600-1½)           | 628 (700-2)                |