

WAAS CH 58104 W09A	APP CRS 084°	Rwy Ldg 6701 TDZE 845 Apt Elev 845
--	------------------------	---

RNAV (GPS) RWY 9L
GRAND FORKS INTL (GFK)



RNP APCH - GPS.

▼ Baro-VNAV and VDP NA when using CKN altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -21°C or above 54°C. When local altimeter setting not received, use CKN altimeter setting and increase LPV DA to 1106 feet and all visibilities ½ SM. Increase LNAV/VNAV DA to 1156 feet and all visibilities ½ SM. Increase all MDAs 80 feet and LNAV visibility Cat C/D ¼ SM. and Circling visibility Cat C ¼ SM.

MISSED APPROACH: Climb to 2800 direct URBAN and hold.

ATIS 119.4	GRAND FORKS APP CON★ 118.1 318.1	GRAND FORKS TOWER★ 118.4(CTAF)0 350.35	GND CON 124.575	CLNC DEL 135.725	UNICOM 122.95
---------------	-------------------------------------	---	--------------------	---------------------	------------------

Procedure NA for arrivals
at GFK VOR/DME
on V55 northeast bound.

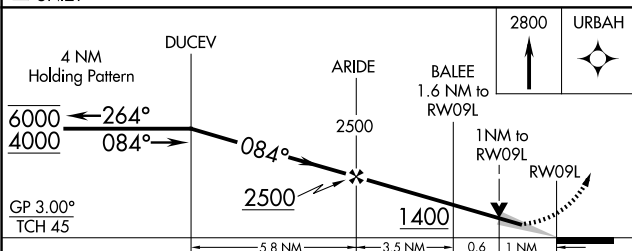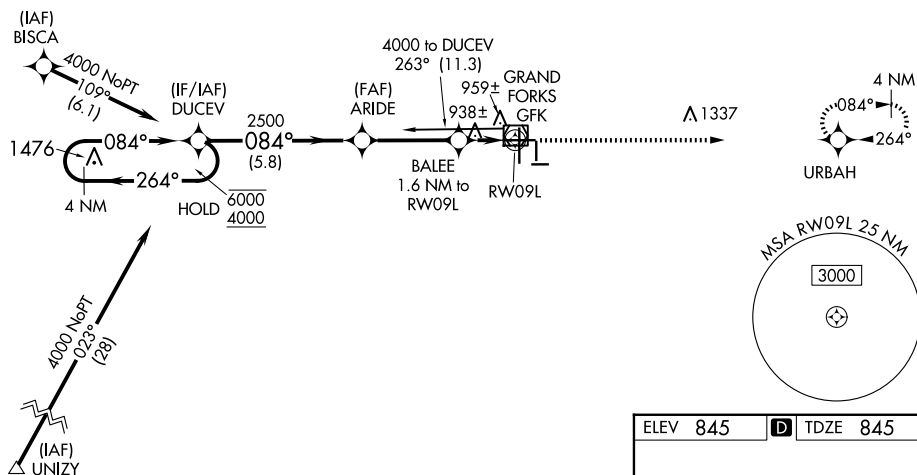

CATEGORY	A	B	C	D
LPV DA		1045- ³ / ₄	200 (200- ³ / ₄)	
LNAV/ VNAV DA		1095- ³ / ₄	250 (300- ³ / ₄)	
LNAV MDA		1200-1	355 (400-1)	
 CIRCLING	1260-1 415 (500-1)	1300-1 455 (500-1)	1400-1½ 555 (600-1½)	1420-2 575 (600-2)

