

WAAS CH 58141 W23A	APP CRS 230°	Rwy Idg 5501 TDZE 182 Apt Elev 182
--	------------------------	---

RNAV (GPS) RWY 23
SUMTER (SMS)

RNP APCH.

A

Circling NA to Rwy's 14 and 32. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 54°C. Inop table does not apply to LPV all Cats. For inop ALS increase LNAV/VNAV Cat A/B visibility to 7/8 SM.


ODALS




MISSED APPROACH:
Climb to 600 then
climbing left turn to
2400 direct GAUGH
and hold.

AWOS-3
118.075

SHAW APP CON★
125.4

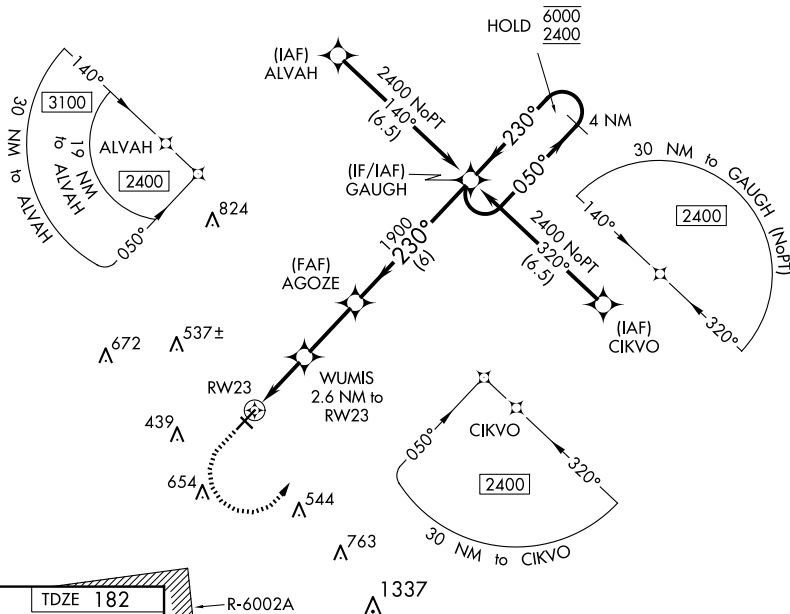UNICOM
122.7 (CTAF) **L**

ELEV 182		TDZE 182
----------	--	----------



MIRL Rwy 5-23 **L**
REIL Rwy 5 and 23 **L**

600 ↑ 2400 ↖ GAUGH ✦					
*LNAV only.					
1 NM 1.6 NM 2.7 NM 6 NM					
CATEGORY	A	B	C	D	
LPV DA	382- ³ / ₄		200 (200- ³ / ₄)		
LNAV/VNAV DA	460- ³ / ₄		278 (300- ³ / ₄)		
LNAV MDA	540- ³ / ₄ 358 (400- ³ / ₄)		540- ⁷ / ₈ 358 (400- ⁷ / ₈)		
CIRCLING	600-1 418 (500-1)	680-1 498 (500-1)	1000-2 ¹ / ₂ 818 (900-2 ¹ / ₂)	1000-2 ³ / ₄ 818 (900-2 ³ / ₄)	

RNAV (GPS) RWY 23