

NDB AIK	APP CRS	Rwy Ldg	5500
347	225°	TDZE	515
		Apt Elev	529

NDB RWY 25
AIKEN RGNL (AIK)

▼
▲ NA



When local altimeter setting not received, use Augusta Rgnl at Bush Fld altimeter setting and increase all MDAs 120 feet; increase S-25 Cats B/C/D and Circling Cat C visibility ¼ SM. For inop ODALS, increase S-25 Cat C/D visibility to 1⅞ mile. For inop ODALS when using Augusta Rgnl at Bush Fld altimeter setting, increase S-25 Cat C/D visibility to 2½ mile. Helicopter visibility reduction below ¾ SM NA.

ODALS


⬤ ⋮

MISSED APPROACH: Climbing right turn to 2200 in AIK NDB holding pattern.

AWOS-3PT 118.025	AUGUSTA APP CON★ 119.15 284.625	UNICOM 122.8 (CTAF) 0
---------------------	------------------------------------	--------------------------

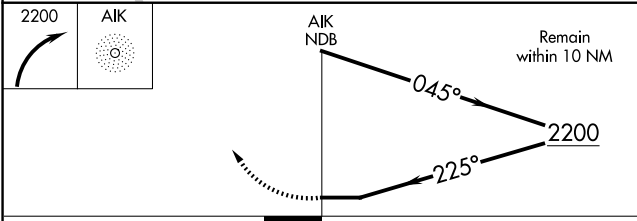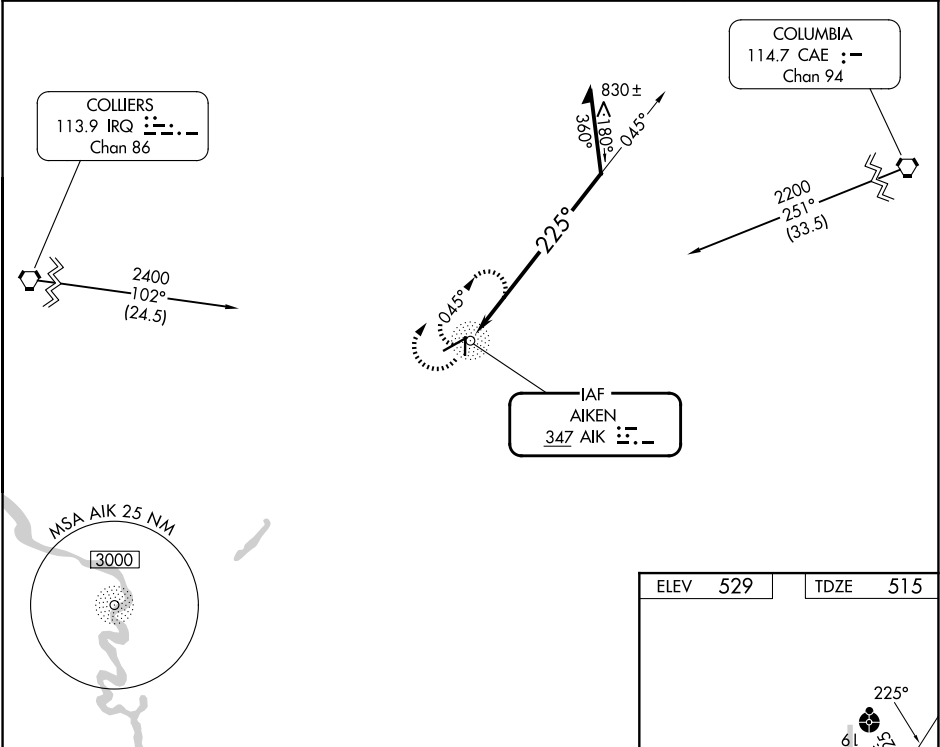

CATEGORY	A	B	C	D
S-25	1180-¾ 665 (700-¾)	1180-1¾ 665 (700-1¾)	1180-1¾ 651 (700-1¾)	1420-3 891 (900-3)
CIRCLING	1180-1 651 (700-1)			

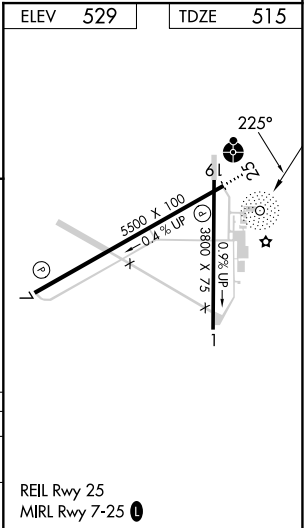

SE-2, 02 OCT 2025 to 30 OCT 2025

SE-2, 02 OCT 2025 to 30 OCT 2025