



WAAS CH 77836 W22A	APP CRS 217°	Rwy Ldg TDZE 1119 Apt Elev 1119
--	------------------------	---

RNAV (GPS) RWY 22
THIEF RIVER FALLS RGNL (TVF)

⚠ Baro-VNAV and VDP NA when using Crockston altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C (2°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. When local altimeter setting not received, use Crockston altimeter setting and increase all DA 82 feet and all MDA 100 feet. Increase LPV all Cats visibility to 1½ mile and LNAV/VNAV all Cats visibility to 1¼ mile.

MISSED APPROACH:
Climb 3300 direct
BOOMS and hold.

AWOS-3PT 119.025	MINNEAPOLIS CENTER 132.15 269.6	UNICOM 122.8 (CTAF) 1
----------------------------	---	---------------------------------

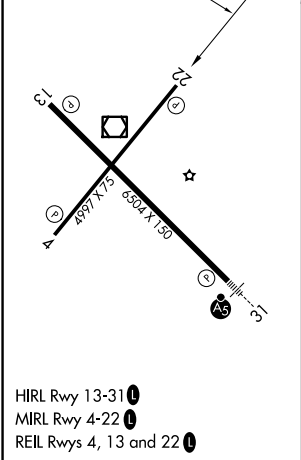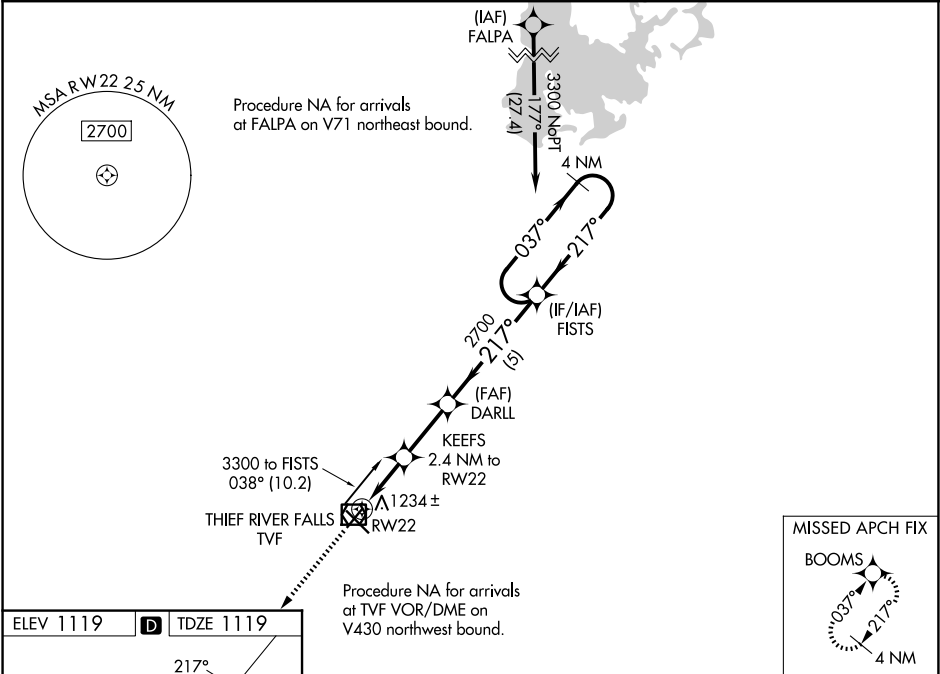

ELEV 1119 D TDZE 1119		3300 BOOMS VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 34).			
*LNAV only		KEEFS 2.4 NM to RW22	DARLL 2700	FISTS 4 NM Holding Pattern	3300
1.1 NM to RW22		1920	2700	GP 3.00° TCH 40	
1.1 NM 1.3 NM 2.4 NM 5 NM					
CATEGORY	A	B	C	D	
LPV DA	1369-1	250 (300-1)	NA		
LNAV/VNAV DA	1396-1	277 (300-1)	NA		
LNAV MDA	1500-1	381 (400-1)	NA		
CIRCLING	1540-1 421 (500-1)	1580-1 461 (500-1)	NA		

NC-1, 02 OCT 2025 to 30 OCT 2025

NC-1, 02 OCT 2025 to 30 OCT 2025