

LOC/DME I-ANE
111.15
Chan **48 (Y)**

APP CRS
269°

Rwy Idg **5000**
TDZE **910**
Apt Elev **912**

ILS or LOC RWY 27

ANOKA COUNTY/BLAINE (JANES FLD) (ANE)

DME required. RADAR required for procedure entry at BLAYN.


⚠

VDP NA when using Crystal altimeter setting. When local altimeter setting not received, use Crystal altimeter setting and increase S-ILS 27 DA to 1131 feet; increase all MDAs 40 feet and S-LOC 27 visibility Cat C/D ¼ SM, and Circling visibility Cat D ¼ SM. For inop ALS when using Crystal altimeter setting, increase S-LOC 27 Cat C/D visibility to 1 ½ SM.

MALSR

MISSED APPROACH: Climb to 2700 direct GEP VORTAC and hold, continue climb-in-hold to 2700.

ATIS 120.625	MINNEAPOLIS APP CON 126.5 335.65	ANOKA TOWER★ 132.4 (CTAF)	GND CON 121.85	CLNC DEL 121.3	CLNC DEL 121.85 (When twr closed)	UNICOM 122.95
------------------------	--	-------------------------------------	--------------------------	--------------------------	--	-------------------------

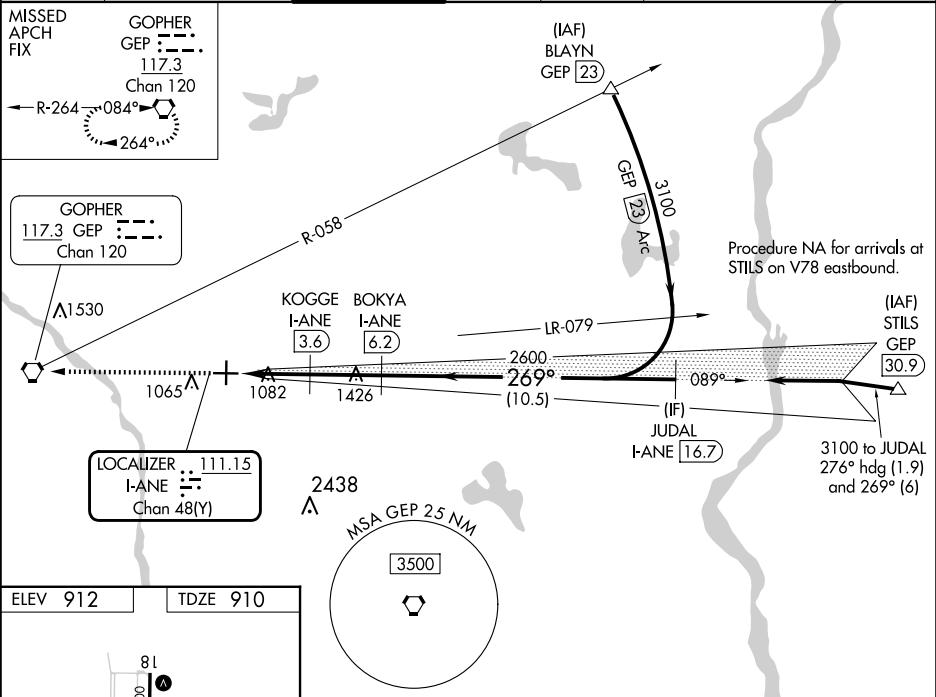

ELEV 912 TDZE 910

HIRL Rwy 9-27

MIRL Rwy 18-36

REIL Rwys 9, 18, and 36

FAF to MAP 5.2 NM

Knots	60	90	120	150	180
Min:Sec	5:12	3:28	2:36	2:05	1:44

2700 GEP

Use I-ANE DME when on the localizer course.

1.2 NM 1.4 NM 2.6 NM 10.5 NM

CATEGORY	A	B	C	D
S-ILS 27	1110-½ 200 (200-½)			
S-LOC 27	1340-½ 430 (500-½)		1340-¾ 430 (500-¾)	
CIRCLING	1400-1 488 (500-1)		1420-1½ 508 (600-1½) 1580-2 668 (700-2)	