

LOC/DME I-SFZ	APP CRS	Rwy Idg	5000
111.9	047°	TDZE	429
Chan 56		Apt Elev	441

LOC RWY 5

NORTH CENTRAL STATE (SF'Z)

▼


▲ NA

Circling Rwy 15, 33 NA at night. VDP NA with Providence altimeter setting. When local altimeter setting not received, use Providence altimeter setting and increase all MDA 100 feet; increase S-5 Cat C and Circling Cat C visibility ¼ mile, and ESULE fix minimums S-5 Cat C visibility ¼ mile.

MALS

MISSED APPROACH: Climb to 1000 then climbing left turn to 2500 on ORW VOR/DME R-057 to FOSTY INT/ ORW 23.5 DME and hold.

AWOS-3PT	PROVIDENCE APP CON ★	CINC DEL	UNICOM
120.775	123.675 244.875	124.35	123.075 (CTAF) 0

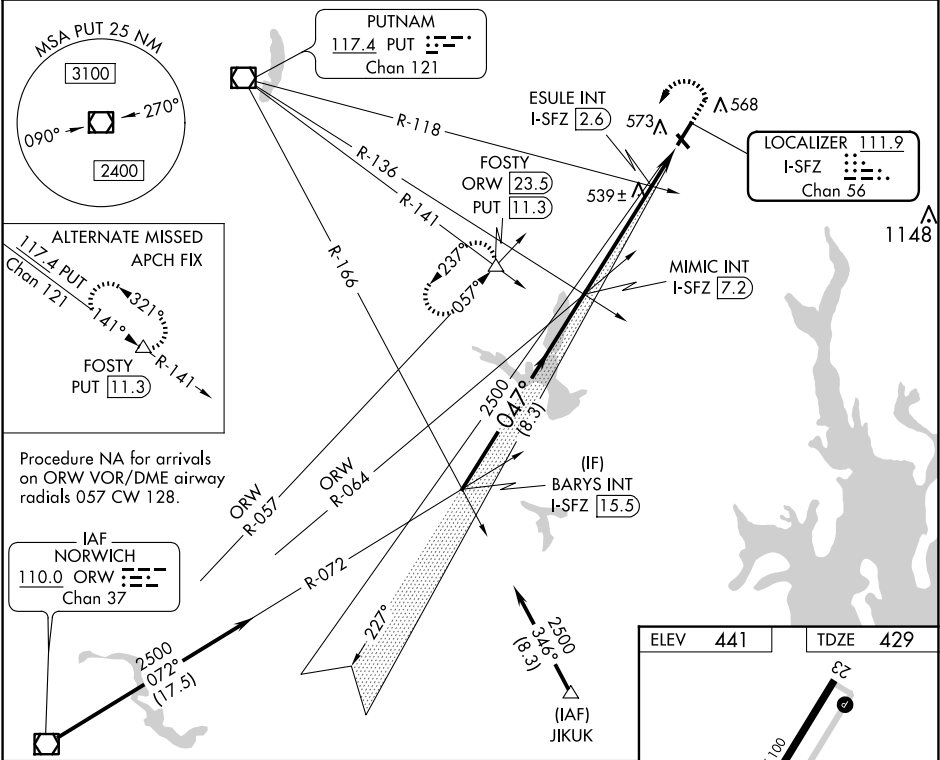

BARYS INT I-SFZ 15.5		MIMIC INT I-SFZ 7.2		1000	2500	ORW R-057	FOSTY △
2500		2500		ESULE INT I-SFZ 2.6		I-SFZ 1.9	
		3.00° TCH 52				I-SFZ 0.8	
		*1140 when using Providence altimeter setting.		*1040			
		8.3 NM		4.6 NM		0.8 NM	
						1 NM	
CATEGORY	A		B		C		D
S-5	1040-¾ 611 (600-¾)		1040-1½ 611 (600-1½)				NA
CIRCLING	1040-1 599 (600-1)		1040-1¾ 599 (600-1¾)				NA
ESULE FIX MINIMUMS (DUAL VOR RECEIVERS OR DME REQUIRED)							
S-5	800-¾ 371 (400-¾)		800-⅞ 371 (400-⅞)				NA
CIRCLING	900-1 459 (500-1)		900-1½ 459 (500-1½)				NA

