

WAAS CH 93608 W03A	APP CRS 038°	Rwy Ldg 4314 TDZE 1450 Apt Elev 1470
--	------------------------	---

RNAV (GPS) RWY 3


DEVILS LAKE RGNL (DVL)

⚠

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C (2°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. When local altimeter setting not received, use Cando altimeter setting and increase all DA 63 feet, and all MDA 80 feet, increase LNAV/VNAV all Cats visibility 1⁄8 mile, LNAV and Circling Cat C and D visibility 1⁄4 mile. Helicopter visibility reduction below 3⁄4 SM NA. Baro-VNAV NA when using Cando altimeter setting.

MISSED APPROACH: Climb to 3400 direct ZEVAS and hold.

AWOS-3PT 125.875	MINNEAPOLIS CENTER 124.2 270.3	UNICOM 122.8 (CTAF) 📶
----------------------------	--	--

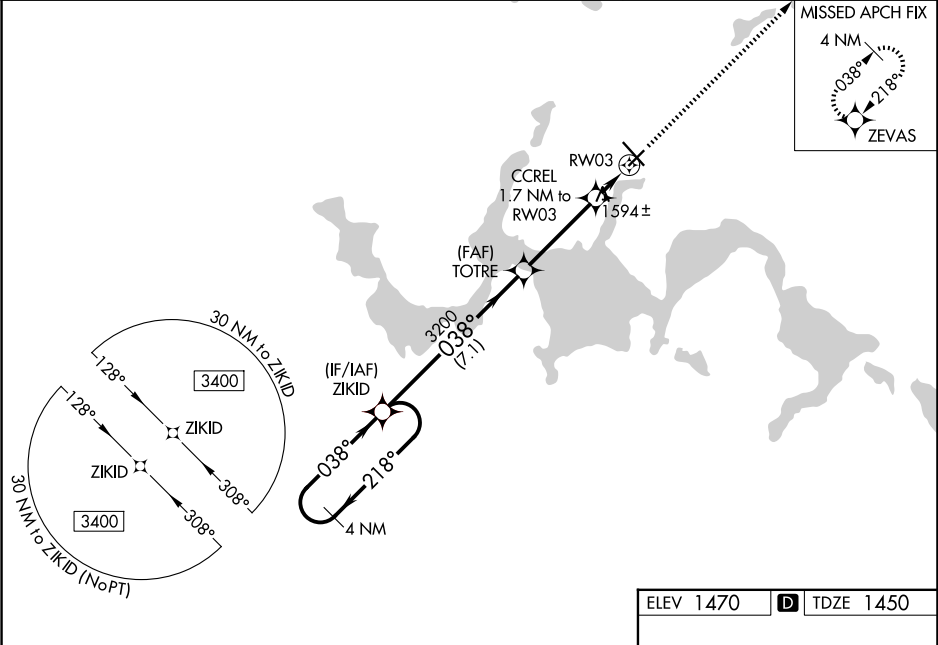

ELEV 1470 D TDZE 1450		VGSi and RNAV glidepath not coincident (VGSi Angle 3.00/TCH 25).		3400	ZEVAS
4 NM Holding Pattern		ZIKID	TOTRE	CCREL 1.7 NM to RW03	*LNAV only.
3400 ← 218° 038° →		038°	3200	*2040	RW03
GP 3.00° TCH 50		7.1 NM	3.6 NM	1.7 NM	
CATEGORY	A	B	C	D	
LPV DA	1700-1		250 (300-1)		
LNAV/VNAV DA	1714-1		264 (300-1)		
LNAV MDA	1860-1	410 (400-1)	1860-1 1⁄8	410 (400-1 1⁄8)	
CIRCLING	2000-1	530 (600-1)	2240-2 1⁄4 770 (800-2 1⁄4)	2240-2 1⁄2 770 (800-2 1⁄2)	

6400 X 100

0.4% UP

038°

HIRL Rwy 13-31 **📶**
REIL Rwy 3, 13 and 21 **📶**
MIRL Rwy 3-21 **📶**