


LOC I-CKV 111.7	APP CRS 347°	Rwy Ldg TDZE Apt Elev	5999 550 550
---------------------------	------------------------	-----------------------------	---


LOC RWY 35
OUTLAW FLD (CKV)

ADF required. RADAR required.	MALS 	MISSED APPROACH: Climb to 1800 then climbing right turn to 2200 direct CKV VOR/DME and hold.
▼ Rwy 35 helicopter visibility reduction below 3/4 SM NA. Circling Rwy 17, 23 ▲ NA NA at night. When local altimeter setting not received, use HOP altimeter setting. Circling NA west of Rwy 17-35. *DME from CKV VOR/DME.		

ASOS 134.575	CAMPBELL APP CON 134.35 307.025	UNICOM 122.8 (CTAF) 0
------------------------	---	---------------------------------

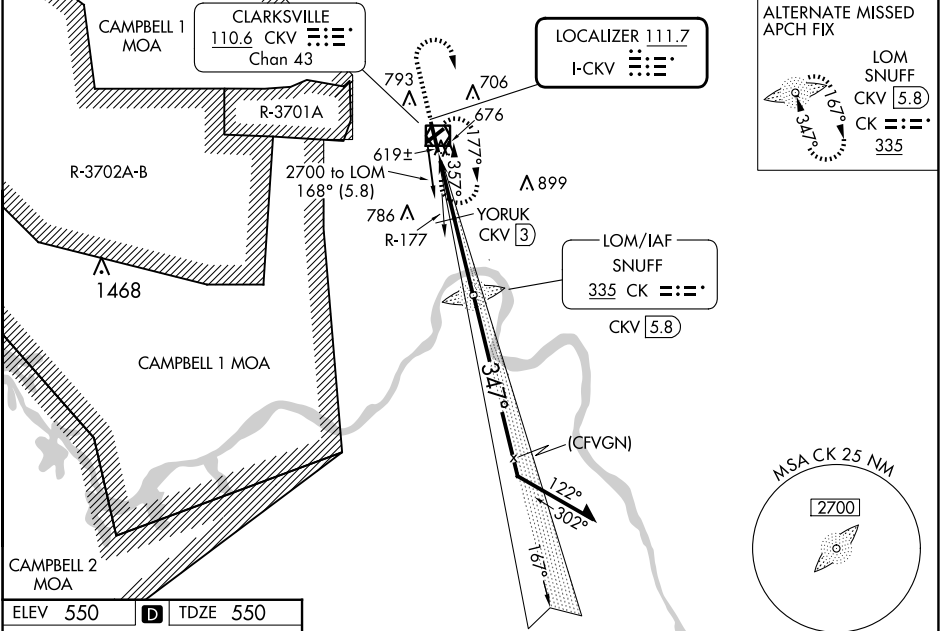

ELEV 550	D	TDZE 550
----------	----------	----------

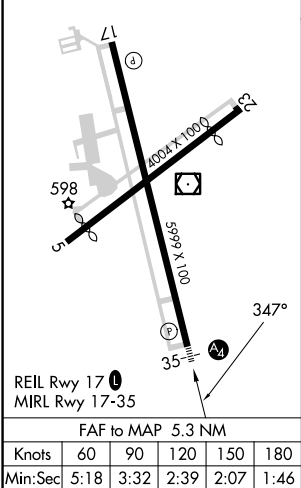

1800	2200	CKV	CK LOM SNUFF CKV [5.8]	VGS1 and descent angles not coincident (VGS1 Angle 3.00/TCH 54).
CATEGORY	A	B	C	D
S-LOC 35	1080-3/4	530 (600-3/4)	1080-1 1/4	530 (600-1 1/4)
C CIRCLING	1080-1	530 (600-1)	1080-1 1/2 530 (600-1 1/2)	1200-2 650 (700-2)
YORUK FIX MINIMUMS * (DME REQUIRED)				
S-LOC 35	880-3/4		330 (400-3/4)	
C CIRCLING	1000-1 450 (500-1)	1020-1 470 (500-1)	1020-1 1/2 470 (500-1 1/2)	1200-2 650 (700-2)

SE-1, 02 OCT 2025 to 30 OCT 2025

SE-1, 02 OCT 2025 to 30 OCT 2025