



WAAS CH 58300 W35A	APP CRS 347°	Rwy Idg 5999 TDZE 550 Apt Elev 550
--	------------------------	---

RNAV (GPS) RWY 35

OUTLAW FLD (CKV)

RNP APCH - GPS.		
⚠ Circling Rwy 5, 17, 23 NA at night. Baro-VNAV and VDP NA when using Campbell AAF (Fort Campbell) altimeter setting. Rwy 35 helicopter visibility reduction below $\frac{3}{4}$ SM NA. Inop table does not apply to LPV all Cats. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -13°C or above 54°C. Circling NA W of Rwy 17-35. For inop ALS, increase LNAV/VNAV all Cats visibility to $\frac{7}{8}$ SM. When local altimeter setting not received, use Campbell AAF (Fort Campbell) altimeter setting.	MALS 	MISSED APPROACH: Climb to 1000 then climbing right turn to 3000 direct GICEB and hold.

ASOS 134.575	CAMPBELL APP CON 134.35 307.025	UNICOM 122.8(CTAF) 0
------------------------	---	--------------------------------

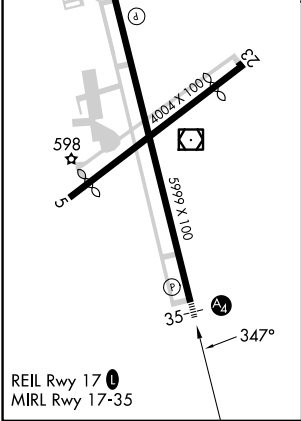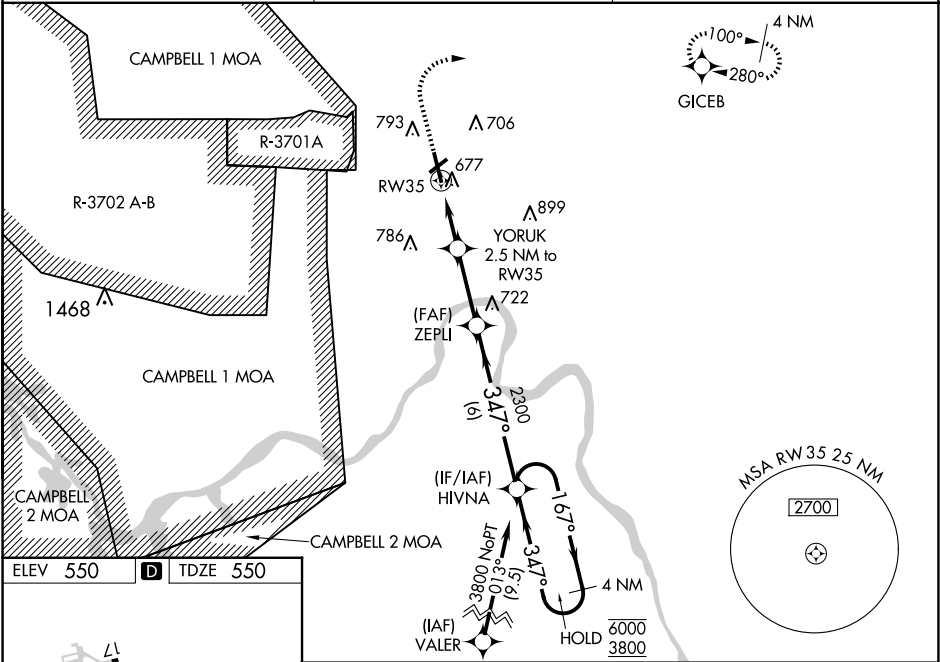

1000	3000	GICEB			
		YORUK 2.5 NM to RW35	ZEPLI 2300	HIVNA 167°→ 6000 ← 347° 3800	
		1.1 NM to RW35	1380	2300	4 NM Holding Pattern GP 3.00° TCH 50
					VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 54).
		1.1 NM	1.4 NM	2.8 NM	6 NM
CATEGORY	A	B	C	D	
LPV DA		805- $\frac{3}{4}$	255 (300- $\frac{3}{4}$)		
LNAV/VNAV DA		838- $\frac{3}{4}$	288 (300- $\frac{3}{4}$)		
LNAV MDA	940- $\frac{3}{4}$	390 (400- $\frac{3}{4}$)	940- $\frac{7}{8}$	390 (400- $\frac{7}{8}$)	
CIRCLING	1000-1 450 (500-1)	1020-1 470 (500-1)	1020-1 $\frac{1}{2}$ 470 (500-1 $\frac{1}{2}$)	1200-2 650 (700-2)	