

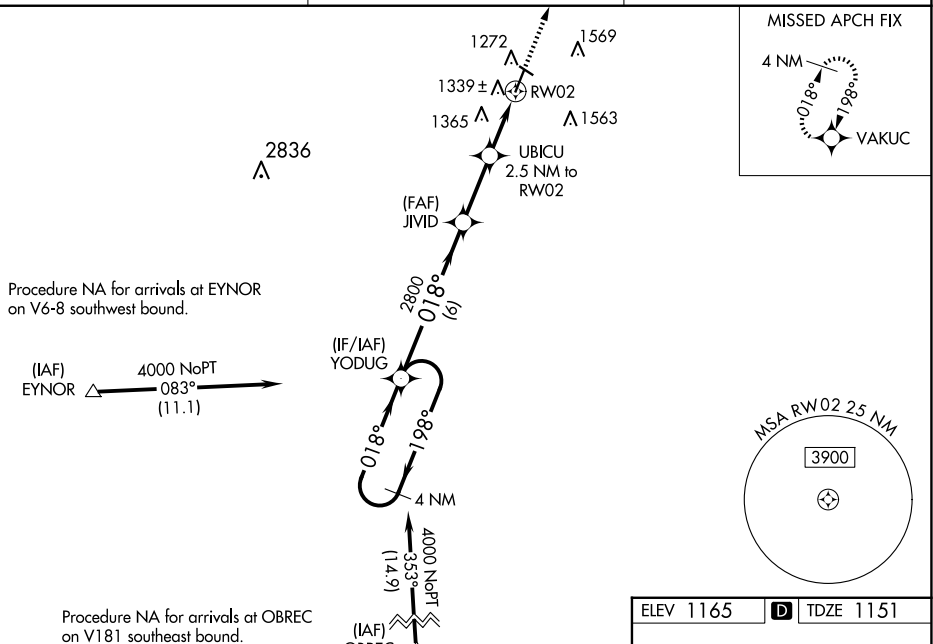
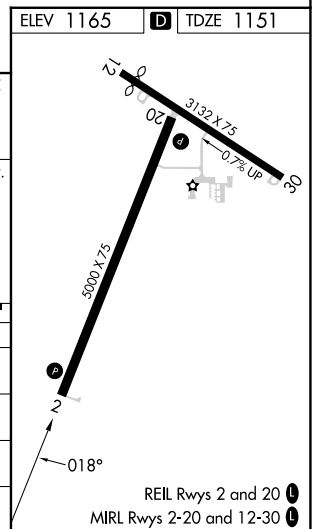
WAAS CH 72828 W02A	APP CRS 018°	Rwy Idg 5000 TDZE 1151 Apt Elev 1165
--	------------------------	---

RNAV (GPS) RWY 2
ATLANTIC MUNI (AIO)

⚠ DME/DME RNP -0.3 NA. Baro-VNAV and VDP NA when using Harlan altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C (2°F) or above 54°C (130°F). When local altimeter setting not received, use Harlan altimeter setting: increase LPV DA to 1450 feet and all visibilities $\frac{1}{2}$ SM; increase LNAV/VNAV DA to 1563 feet and all visibilities $\frac{1}{2}$ SM; increase all Circling RWy 12, 30 NA and LNAV visibility Cat C $\frac{1}{2}$ SM and Circling visibility Cat B/C $\frac{1}{2}$ SM. Circling RWy 12, 30 NA at night.

MISSED APPROACH:
Climb to 4000 direct
VAKUC and hold.

AWOS-3 127.825	MINNEAPOLIS CENTER 119.6 290.4	UNICOM 122.7 (CTAF) 0
--------------------------	--	---------------------------------

[illegible]

NC-3, 02 OCT 2025 to 30 OCT 2025