


WAAS CH 99729 W32A	APP CRS 323°	Rwy Ldg 4755 TDZE 23 Apt Elev 23
--	------------------------	---

RNAV (GPS) RWY 32


A For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15C (5°F) or above 43°C (109°F). DME/DME RNP-0.3 NA. When local altimeter setting not received, use Vero Beach altimeter setting and increase LPV DA to 325, LNAV/VNAV DA to 329 feet and MDA 40 feet; increase LPV all Cats, LNAV/VNAV all Cats, and LNAV Cats C/D visibility ½ SM. Increase Circling visibility Cat C/D ¼ SM. Baro-VNAV NA when using Vero Beach altimeter setting.

MISSED APPROACH: Climb to 520 then climbing left turn to 2000 direct AWOTA and hold.

ATIS 134.825	PALM BEACH APP CON 132.8	FORT PIERCE TOWER ★ 128.2 (CTAF) 0	GND CON (GCO) 119.55
------------------------	------------------------------------	--	--------------------------------

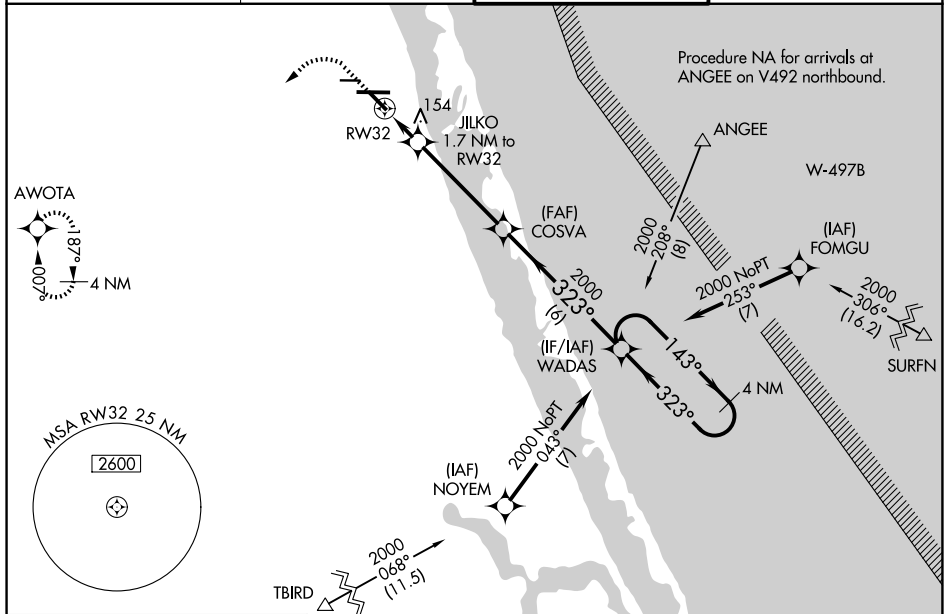

ELEV 23	D	TDZE 23
---------	----------	---------

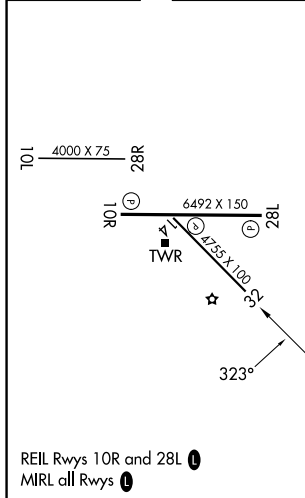

Procedure NA for arrivals at TBIRD
on V159 southbound and V531 northeast bound.

Diagram illustrating the Procedure NA for arrivals at TBIRD on V159 southbound and V531 northeast bound. The diagram shows the 4 NM Holding Pattern, the 2000 frequency, and the 323° heading. The diagram also shows the 1.1 NM segment to RW32, the 0.6 NM segment to JILKO (1.7 NM to RW32), and the 4.4 NM segment to WADAS. The diagram also shows the 600* frequency and the 143° heading.

CATEGORY	A	B	C	D
LPV DA		302-7/8	279 (300-7/8)	
RNAV/ VNAV DA		306-7/8	283 (300-7/8)	
RNAV MDA	420-1	397 (400-1)	420-1 1/8	397 (400-1 1/8)
CIRCLING	460-1 437 (500-1)	480-1 457 (500-1)	880-2 1/2 857 (900-2 1/2)	880-2 3/4 857 (900-2 3/4)