



WAAS CH 78032 W18A	APP CRS 181°	Rwy Idg 4098 TDZE 573 Apt Elev 573
--	------------------------	---

RNAV (GPS) RWY 18

A Baro-VNAV NA when using Centralia altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -21°C (-5°F) or above 54°C (130°F). When local altimeter setting not received, use Centralia altimeter setting: increase LPV DA to 801 feet; increase LNAV/VNAV DA to 890 feet and visibility ½ SM; increase all MDAs 40 feet and LNAV Cats C/D visibility ½ SM and Circling Cats C/D visibility ¼ SM. DME/DME RNP-0.3 NA.

MISSED APPROACH:
Climb to 2600 direct
EMLJ and hold.

AWOS-3PT 118.525	KANSAS CITY CENTER 127.7 351.825	UNICOM 122.725 (CTAF) 0
----------------------------	--	-----------------------------------

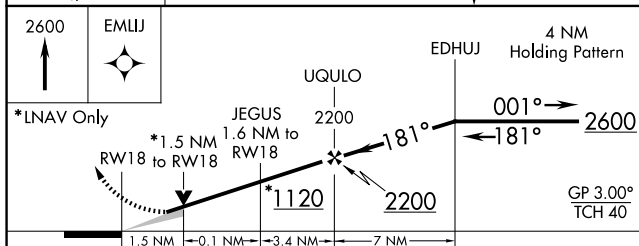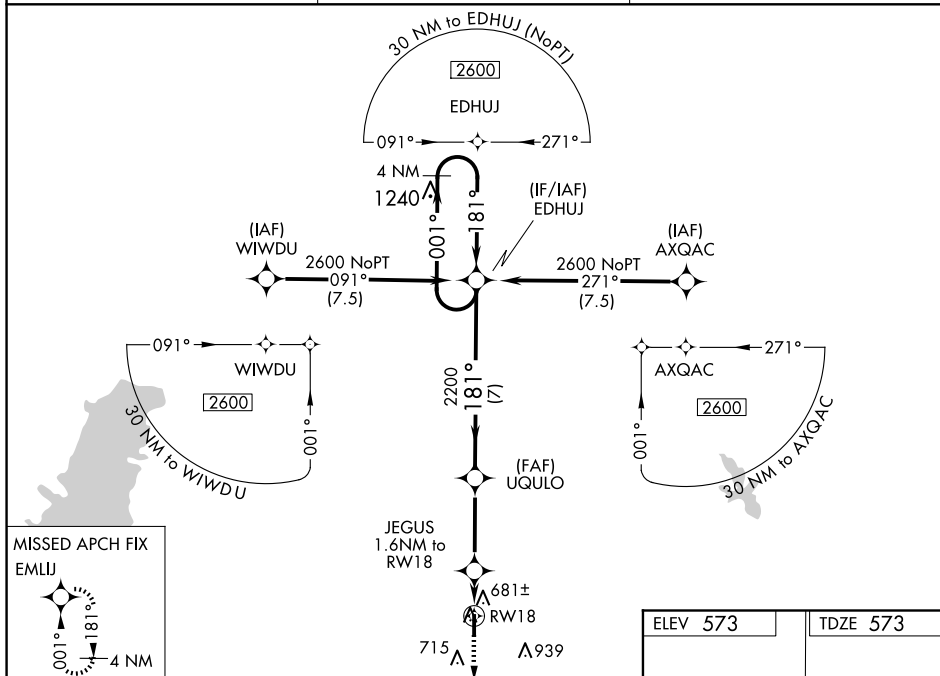

CATEGORY		A	B	C	D
LPV	DA	773-1		200 (200-1)	
LNAV/ VNAV	DA	862-1		289 (300-1)	
LNAV	MDA	940-1		367 (400-1)	
CIRCLING		1040-1	467 (500-1)	1380-2¼ 807 (900-2¼)	1380-2½ 807 (900-2½)

