


VORTAC EUF 109.2 Chan 29	APP CRS 187°	Rwy Idg 5000 TDZE 285 Apt Elev 285
--	------------------------	---

VOR RWY 18
WEEDON FLD (EUF)

NA When local altimeter setting not received, use Columbus, GA altimeter setting and increase all MDAs 40 feet and S-18 visibility Cats C and D ½ SM and Circling Cats C and D ¼ SM. Increase AFENY fix minimums S-18 visibility Cats C and D ½ SM and Circling visibility Cats C and D ¼ SM.

MISSED APPROACH: Climb to 1500 then climbing right turn to 2000 direct EUF VORTAC and hold.

ASOS 128.325	ATLANTA APP CON ★ 125.5 323.1	CLNC DEL 134.25 339.8	UNICOM 122.8 (CTAF) 0
------------------------	---	---------------------------------	---------------------------------

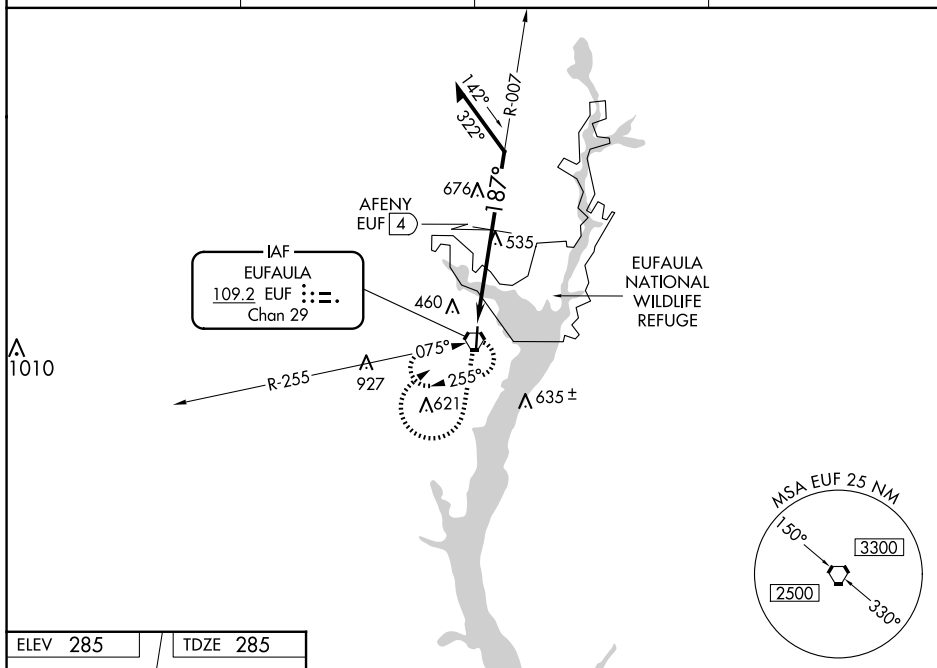

ELEV 285	/	TDZE 285
----------	---	----------

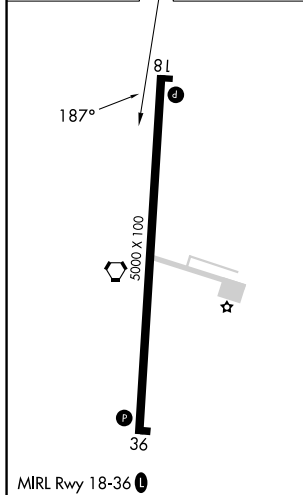


Diagram illustrating the AFENY VORTAC and its associated navigation aids. The VORTAC is shown with a 007° bearing to a 2000 ft MSL obstacle and a 187° bearing to a 1040 ft MSL obstacle. A 4 NM distance is marked. A note indicates "1080 when using Columbus, GA altimeter setting."