

WAAS CH 53339 W28A	APP CRS 277°	Rwy Idg 3807 TDZE 350 Apt Elev 355
--	------------------------	---


RNAV (GPS) RWY 28
HENRY TIFT MYERS (TMA)

▼ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 54°C (130°F). Baro-VNAV and VDP NA when using Moultrie altimeter setting. DME/DME RNP-0.3 NA. When local altimeter setting not received, use Moultrie altimeter setting; increase LPV DA to 673 feet and LNAV/VNAV DA to 689 feet and all MDA 80 feet; increase LPV all Cats and LNAV/VNAV all Cats visibility ½ mile, LNAV Cat C/D visibility ¼ mile, and increase Circling Cat C visibility ¼ mile. Straight-in minimums NA at night. Circling Rwy 10 NA at night. Helicopter visibility reduction below ¾ SM NA.



MISSED APPROACH: Climb to 800 then climbing right turn to 2000 direct ZOKAD and hold.

AWOS-3PT
118.525

VALDOSTA APP CON ★
126.6 285.6

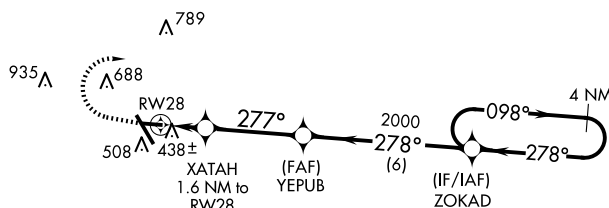UNICOM
122.7 (CTAF) **L**

Procedure NA for arrivals at OTK
VOR/DME on V579 southbound.



800 2000 ZOKAD

*LNAV only.

XATAH 1.6 NM to RW28

YEPUB 2000

ZOKAD 2000

4 NM Holding Pattern

098° 278°

*1.1 NM to RW28

RW28

*880

2000

GP 3.00° TCH 40

1.1 0.5 NM 3.5 NM 6 NM

CATEGORY	A	B	C	D
LPV DA		604-1	254 (300-1)	
LNAV/VNAV DA		628-1	278 (300-1)	
LNAV MDA		720-1	370 (400-1)	

C CIRCLING

920-1 565 (600-1)	1060-1 705 (800-1)	1060-2 705 (800-2)	1240-3 885 (900-3)
----------------------	-----------------------	-----------------------	-----------------------

