

WAAS CH 97414 W26A	APP CRS 259°	Rwy Ldg 5000 TDZE 463 Apt Elev 463
--	------------------------	---


RNAV (GPS) RWY 26R
SPIRIT OF ST LOUIS (SUS)

RNP APCH - GPS.


V Baro-VNAV and VDP NA when using St Louis Lambert Intl altimeter setting. Rwy 26R helicopter visibility reduction below $\frac{3}{4}$ SM NA. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -18°C or above 54°C. When local altimeter setting not received, use St Louis Lambert Intl altimeter setting: increase LPV DA to 798 feet and all visibilities $\frac{1}{8}$ SM, increase LNAV/VNAV DA to 823 feet and all visibilities $\frac{1}{8}$ SM; increase all MDA 60 feet.

MISSED APPROACH: Climb to 3000 direct EXESS and hold.

ATIS	ST. LOUIS APP CON	SPIRIT TOWER★	GND CON	CLNC DEL	ST. LOUIS CLNC DEL	UNICOM
134.8	126.5 254.3	124.75 (CTAF) 0 257.2	121.7	133.1	121.7 (when tower closed)	122.95

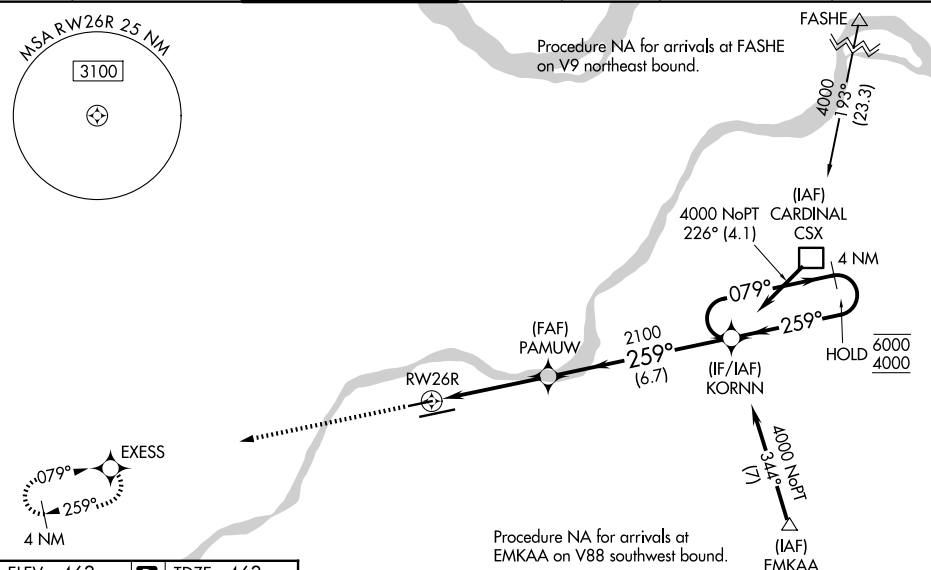

ELEV 463	D	TDZE 463
----------	----------	----------

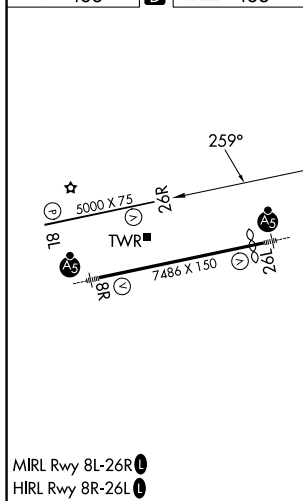

RNAV (GPS) RWY 26R