

WAAS CH 48936 W31A	APP CRS 306°	Rwy Ldg TDZE 973 Apt Elev 975	5007
--	------------------------	---	-------------

RNAV (GPS) RWY 31

MARSHALLTOWN MUNI (MIW)

RNP APCH.


▼

▲

Baro-VNAV and VDP NA when using Grinnell altimeter setting. Rwy 31 Helicopter visibility reduction below ¾ SM NA. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -22°C or above 54°C. When local altimeter setting not received, use Grinnell altimeter setting and increase all DA 64 feet and all MDA 80 feet; increase LPV and LNAV/VNAV all Cats visibility ⅛ SM and LNAV Cats C/D and Circling Cat D visibility ¼ SM. Circling Rwy 18, 36 NA at night.

MISSED APPROACH:
Climb to 2700 direct BRIDY and hold.

ASOS 128.325	DES MOINES APP CON * 120.9	CLNC DEL 120.9	UNICOM 122.8 (CTAF) 0
------------------------	--------------------------------------	--------------------------	--

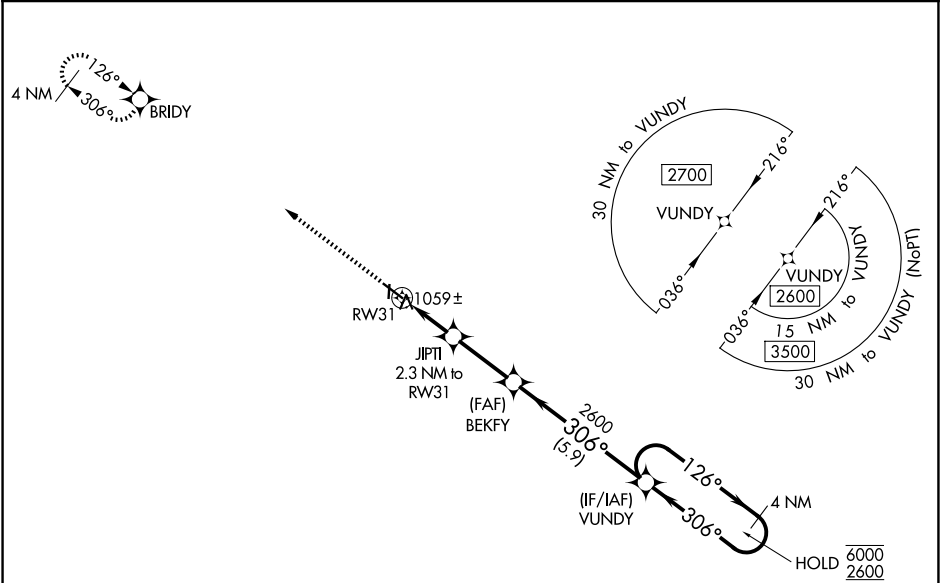

ELEV 975 TDZE 973

2700 BRIDY

*LNAV only

RW31

JIPTI 2.3 NM to RW31

BEKFY 2600

VUNDY 4 NM Holding Pattern

1740*

2600

6000

2600

GP 3.00°

TCH 37

CATEGORY	A	B	C	D
LPV DA		1223-1	250 (300-1)	
LNAV/VNAV DA		1223-1	250 (300-1)	
LNAV MDA		1320-1	347 (400-1)	
CIRCLING	1400-1 425 (500-1)	1440-1 465 (500-1)	1460-1½ 485 (500-1½)	1840-2¾ 865 (900-2¾)

36

81

5007 X 100

2756 X 50

36

306°

MIRL Rwy 13-31 and 18-36 **0**
REIL Rwy 13 and 31 **0**

MARSHALLTOWN, IOWA
Amdt 1B 28FEB19

42°07'N-92°55'W

MARSHALLTOWN MUNI (MIW)

RNAV (GPS) RWY 31

NC-3, 02 OCT 2025 to 30 OCT 2025

NC-3, 02 OCT 2025 to 30 OCT 2025