


WAAS CH 53641 W23A	APP CRS 228°	Rwy Ldg TDZE Apt Elev	5500 927 927
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 23
LAKE CUMBERLAND RGNL (SME')

RNP APCH - GPS. ⚠ Rwy 23 helicopter visibility reduction below ¾ SM NA. When local altimeter setting not received, use Monticello altimeter setting and increase all MDAs 60 feet and LNAV visibility Cat B/C/D ½ SM, and LP visibility Cat C/D ⅓ SM, and Circling visibility Cat B ¼ SM. VDP NA when using Monticello altimeter setting.	MISSED APPROACH: Climb to 3600 direct TOOLY and hold.
--	---

AWOS-3 120.05	INDIANAPOLIS CENTER 124.625 371.925	UNICOM 122.8 (CTAF) 1
-------------------------	---	---------------------------------

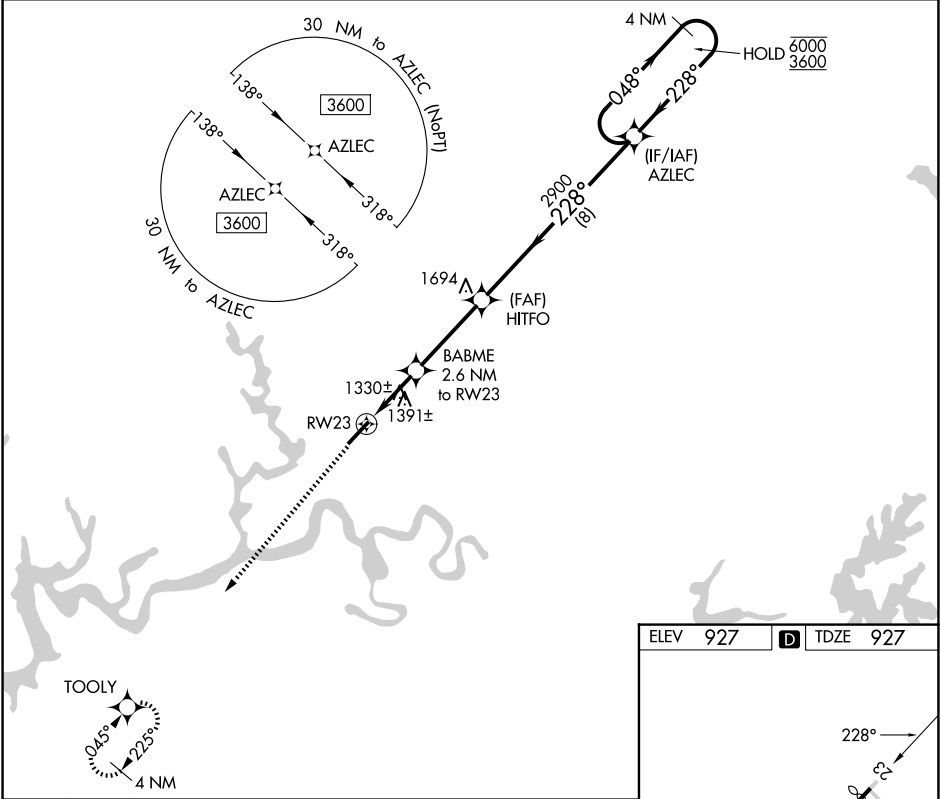

3600	TOOLY				
↑	✧				
RW23		1.9 NM to RW23	BABME 2.6 NM to RW23	HITFO	AZLEC 4 NM Holding Pattern
		1820	2900	228°	048° → 6000 / ← 228° 3600
		1.9 NM	0.7 NM	3.4 NM	8 NM
CATEGORY	A	B	C	D	
LP MDA	1580-1	653 (700-1)	1580-1 7/8	653 (700-1 7/8)	
LNAV MDA	1660-1	733 (800-1)	1660-2	733 (800-2)	
CIRCLING	1660-1	1700-1	2100-3	1173 (1200-3)	
	733 (800-1)	773 (800-1)			

