


WAAS CH 99619 W16A	APP CRS 159°	Rwy Ldg TDZE 1999 Apt Elev 1999
--	------------------------	---

RNAV (GPS) RWY 16
HAYS RGNL (HYS)

⚠ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -18°C (0°F) or above 45°C (113°F).
DME/DME RNP-0.3 NA. Visibility reduction by helicopters NA. When local altimeter setting not received, use Russell altimeter setting: increase LPV DA to 2318 feet; increase LNAV/VNAV DA to 2445 feet and visibility all Cats ½ SM; increase all MDA 80 feet and visibility LNAV and Circling Cat C and D ¼ SM. Baro-VNAV NA when using Russell altimeter setting. Circling NA for Cat D northwest of Rwy 4 and west of Rwy 16.

MISSED APPROACH:
Climb to 4000 direct
GEYJA and hold.

AWOS-3PT 125.525	KANSAS CITY CENTER 124.4 322.4	UNICOM 122.8 (CTAF) 0
----------------------------	--	---------------------------------

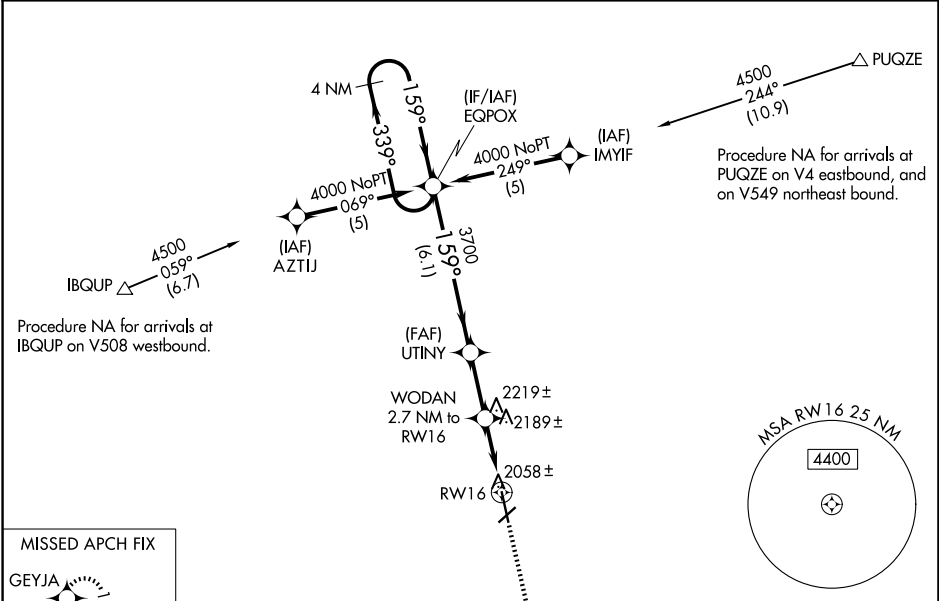

ELEV 1999 D TDZE 1999				
GEYJA				
4000				
UTINY				
WODAN 2.7 NM to RW16				
RW16				
*2900				
*LNAV only				
6.1 NM				
2.4 NM				
2.7 NM				
CATEGORY	A	B	C	D
LPV DA	2249-1		250 (300-1)	
LNAV/VNAV DA	2308-1		309 (400-1)	
LNAV MDA	2440-1	441 (500-1)	2440-1¼ 441 (500-1¼)	2440-1½ 441 (500-1½)
CIRCLING	2480-1	481 (500-1)	2560-1½ 561 (600-1½)	2680-2¼ 681 (700-2¼)

