

WAAS CH 78319 W34A	APP CRS 339°	Rwy Ldg TDZE 1994 Apt Elev 1999
--	------------------------	---

RNAV (GPS) RWY 34



HAYS RGNL (HYS)

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -18°C (0°F) or above 45°C (113°F). DME/DME RNP-0.3 NA. When local altimeter setting not received, use Russell altimeter setting: increase LPV DA to 2263 feet; increase LNAV/VNAV DA to 2565 feet and visibility all Cats ¼ SM; increase all MDA 80 feet and visibility LNAV Cat C and Circling Cat C and D ¼ SM. Circling NA for Cat D northwest of Rwy 4 and west of Rwy 16. For inoperative MALSR when using Russell altimeter setting, increase LPV all Cats visibility to 1 mile. VDP and Baro-VNAV NA when using Russell altimeter setting.

MALSR

MISSED APPROACH:
Climb to 4000 direct
EQPOX and hold.

AWOS-3PT 125.525	KANSAS CITY CENTER 124.4 322.4	UNICOM 122.8 (CTAF) 0
----------------------------	--	---------------------------------

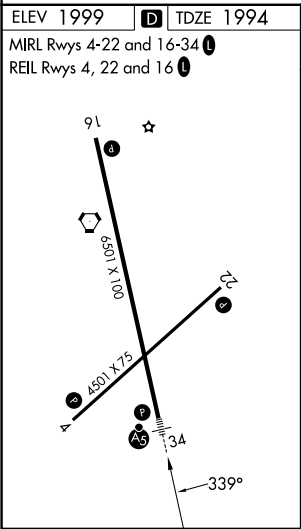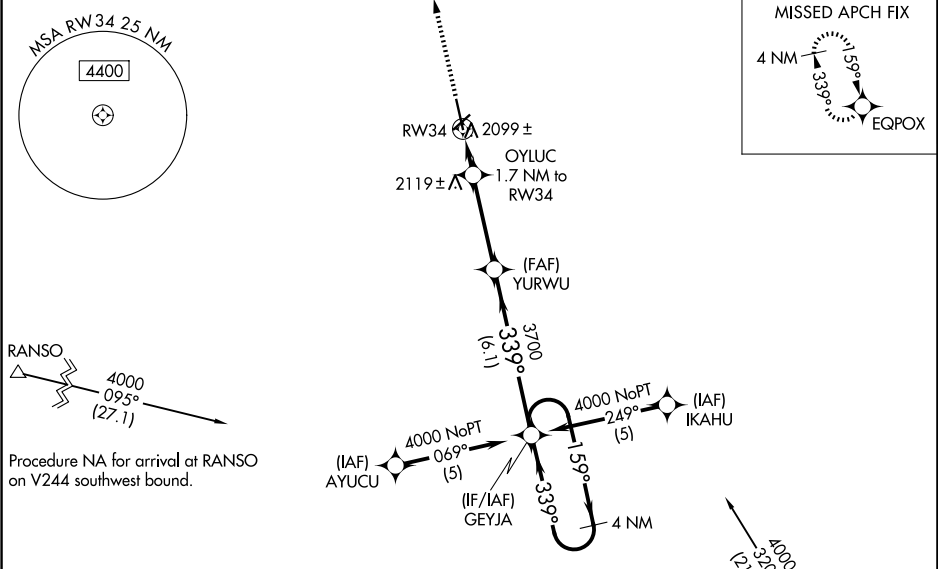

4000	EQPOX	4 NM Holding Pattern 159° 339° 4000 3700 3700 2560* 1.1 NM 0.6 3.5 NM 6.1 NM GP 3.00° TCH 45			
*LNAV only	OYLUC 1.7 NM to RW34	YURWU 3700	GEYJA	4000	
	*1.1 NM to RW34				
CATEGORY	A	B	C	D	
LPV DA	2194-½ 200 (200-½)				
LNAV/VNAV DA	2496-1¼ 502 (500-1¼)				
LNAV MDA	2380-½ 386 (400-½)			2380-1 386 (400-1)	
CIRCLING	2480-1	481 (500-1)	2560-1½ 561 (600-½)	2680-2¼ 681 (700-2¼)	