

WAAS CH 63230 W17A	APP CRS 173°	Rwy Ldg 5501 TDZE 592 Apt Elev 592
--	------------------------	---


RNAV (GPS) RWY 17
MC GREGOR EXEC (PWG)

RNP APCH - GPS.

T Baro-VNAV NA when using Waco Rgnl altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -20°C or above 54°C. When local altimeter setting not received, use Waco Rgnl altimeter setting and increase LPV DA to 873 feet and all visibilities ½ SM; increase LNAV/VNAV DA to 873 feet and all visibilities ½ SM; increase all MDAs 40 feet and Circling visibility Cat C ½ SM.

MISSED APPROACH:
Climb to 2500 direct
ZUDIS and on track
095° to SATTY and hold.

AWOS-3PT 135.525	WACO APP CON★ 127.65 352.0	UNICOM 123.05 (CTAF) ①
----------------------------	--------------------------------------	----------------------------------

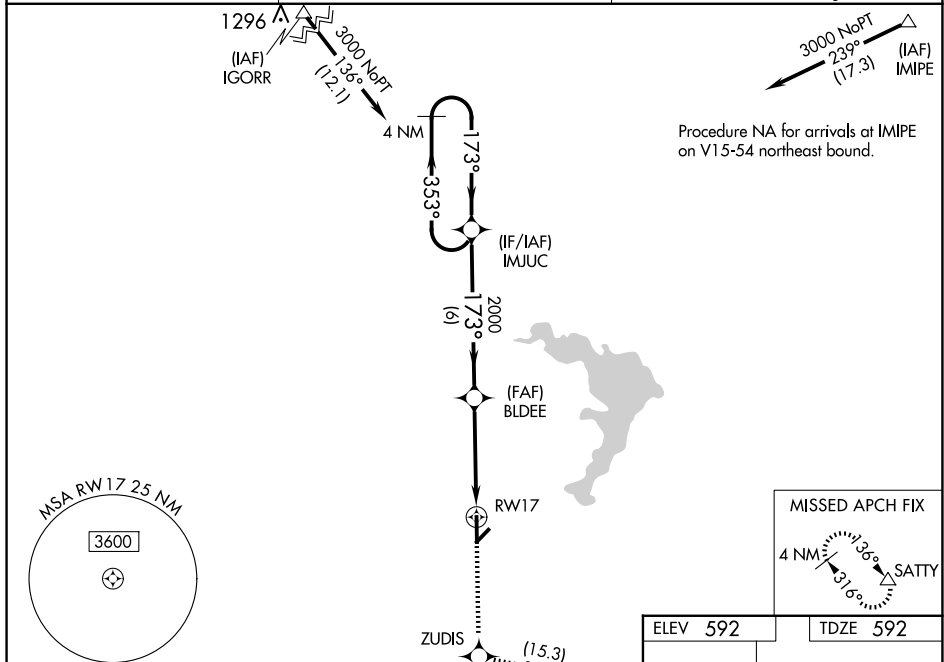

CATEGORY	A	B	C	D
LPV DA	842 ^{-3/4}	250 (300 ^{-3/4})		NA
LNAV/ VNAV DA	842 ^{-3/4}	250 (300 ^{-3/4})		NA
LNAV MDA	1040-1	448 (500-1)	1040-1 ^{3/8} 448 (500-1 ^{3/8})	NA
CIRCLING	1040-1 448 (500-1)	1060-1 468 (500-1)	1300-2 708 (800-2)	NA

MIRL Rwy 17-35

REIL Rwy 17