

WAAS CH 87130 W35A	APP CRS 353°	Rwy Ldg 5501 TDZE 580 Apt Elev 592
--	------------------------	---


RNAV (GPS) RWY 35
MC GREGOR EXEC (PWG)

RNP APCH - GPS	
----------------	--

T Baro-VNAV NA when using Waco Rgnl altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 54°C. When local altimeter setting not received, use Waco Rgnl altimeter setting and increase LPV DA to 861 feet; increase LNAV/VNAV DA to 861 feet; increase all MDAs 40 feet and LNAV visibility Cat B ¼ SM, and Circling visibility Cat B/C ¼ SM. Rwy 35 helicopter visibility reduction below ¾ SM NA.

MISSED APPROACH: Climb to 2500 direct BLDEE and on track 018° to ACT VORTAC and hold.

AWOS-3PT 135.525	WACO APP CON★ 127.65 352.0	UNICOM 123.05 (CTAF) U
----------------------------	--------------------------------------	---

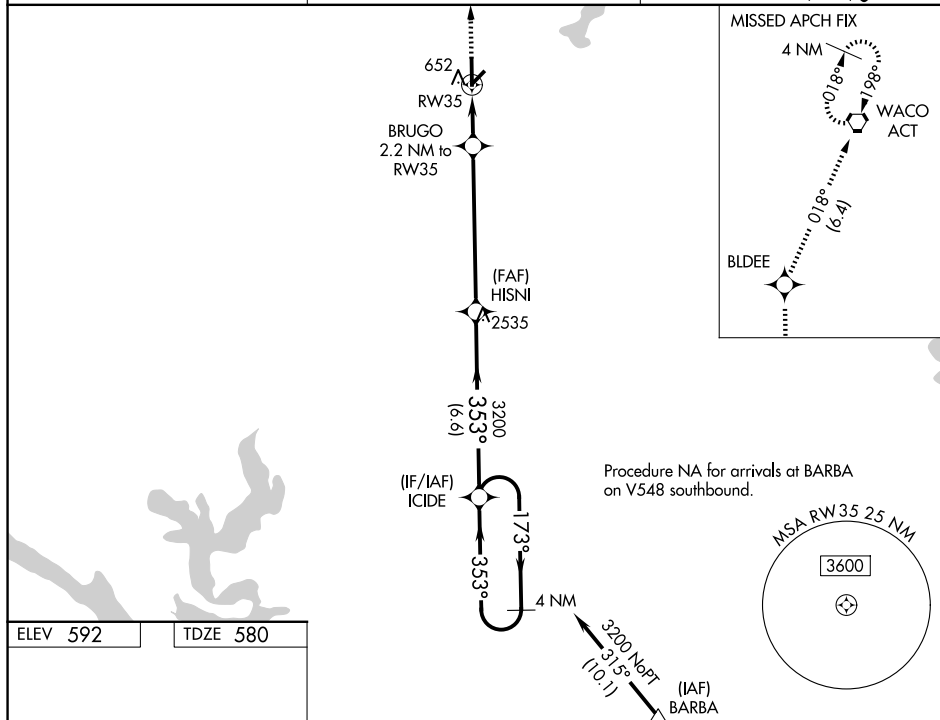

MRL Rwy 17-35
REIL Rwy 17

