

WAAS CH 41063 W17A	APP CRS 168°	Rwy Idg TDZE 152 Apt Elev 152	6002
--	------------------------	---	-------------


RNAV (GPS) RWY 17R
DAVID WAYNE HOOKS MEML (DWH)

RNP APCH-GPS.

Baro-VNAV NA when using George Bush Intcnl/Houston altimeter setting. For uncompensated Baro-VNAV systems, procedure NA below -2°C or above 54°C. Rwy 17R helicopter visibility reduction below ¾ SM NA. When local altimeter setting not received, use George Bush Intcnl/Houston altimeter setting: Increase all DAs 36 feet and visibilities ½ SM; increase all MDAs 40 feet. When control tower closed, LPV visibility 1 SM.

MISSED APPROACH:
Climb to 2000 direct KOHRY and hold.

ATIS 128.375	HOUSTON APP CON 119.7 281.4	HOOKS TOWER* 127.4 354.1 EAST 118.4 (CTAF) 0 354.1 WEST	GND CON 121.8 239.0	CLNC DEL 119.45	UNICOM 122.95
------------------------	---------------------------------------	---	-------------------------------	---------------------------	-------------------------

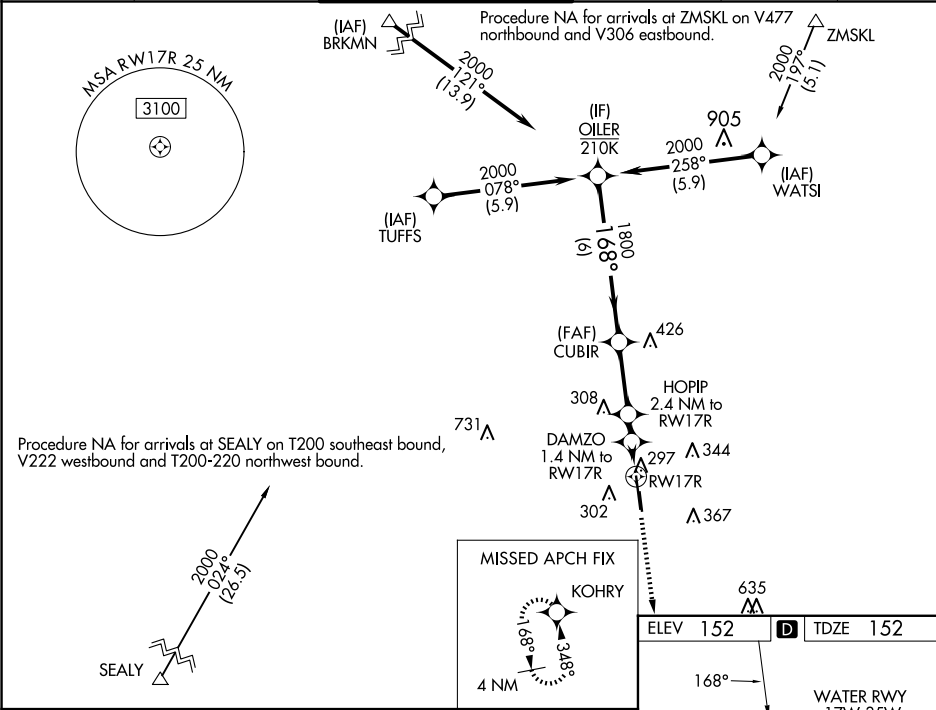

GP 3.00° TCH 52							
CATEGORY	A		B	C	D		
LPV DA	402-3/4		250 (300-3/4)				
LNNAV/ VNAV DA	508-1 1/8		356 (400-1 1/8)				
LNNAV MDA	600-1		448 (500-1)		600-1 3/8	448 (500-1 3/8)	
CIRCLING	640-1		660-1		680-1 1/2		780-2
	488 (500-1)		508 (600-1)		528 (600-1 1/2)		628 (700-2)

