

APP CRS
348°

Rwy Ldg
TDZE
Apt Elev
8598
24
27


RNAV (RNP) Z RWY 35L
SACRAMENTO INTL (SMF')

RNP AR APCH-GPS.
▼ For uncompensated Baro-VNAV systems, procedure NA below -2°C or above 54°C. For inop ALS, increase RNP 0.12 all Cats visibility to RVR 4500; increase RNP 0.30 all Cats visibility to RVR 5500.

MALSR
AS

MISSED APPROACH: Climb to 2000 on track 348° to JARNU and track 321° to GRIME and hold.

D-ATIS 126.75	NORCAL APP CON 125.4 259.1 (W-NE) 125.25 257.9 (SW) 127.4 317.5 (E-SE)	CAPITOL TOWER 125.7 256.7	GND CON 121.7 256.7	CLNC DEL 121.1 256.7	CPDLC
-------------------------	---	-------------------------------------	-------------------------------	--------------------------------	-------

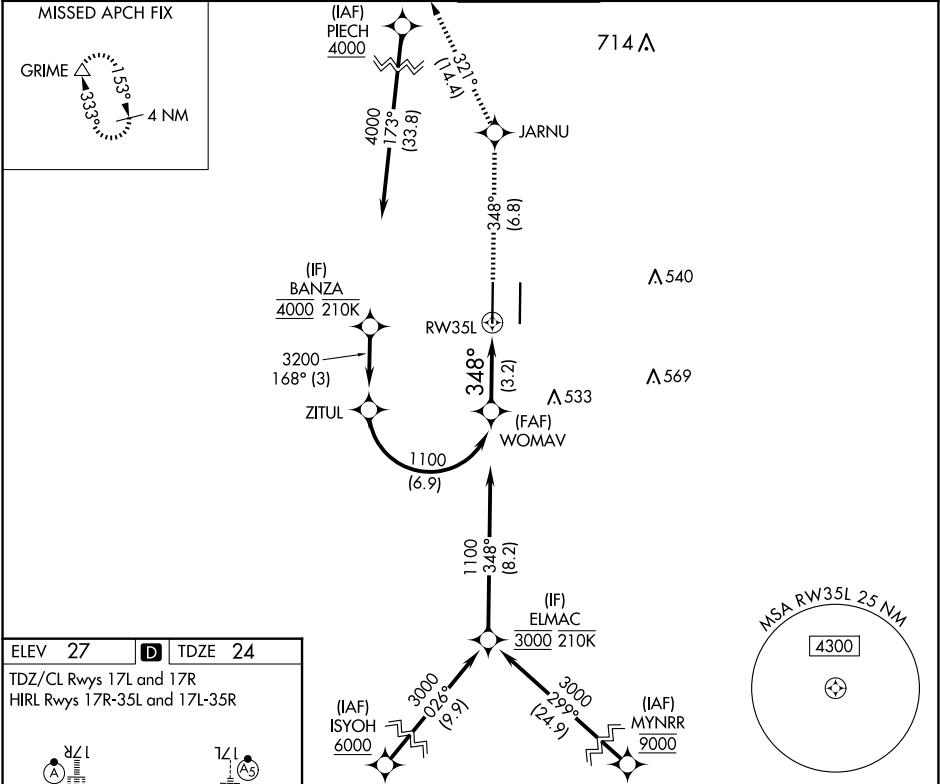

ELEV 27	D	TDZE 24
TDZ/CL Rwy's 17L and 17R HIRL Rwy's 17R-35L and 17L-35R		
VGS and RNAV glidepath not coincident (VGS Angle 3.00/TCH 76).		
GP 3.00° TCH 59		
3.2 NM		
CATEGORY	A	B
RNP 0.12 DA	318/24	294 (300-1/2)
RNP 0.30 DA	382/30	358 (400-5/8)
AUTHORIZATION REQUIRED		