

WAAS
CH **65607**
W16A

APP CRS
159°

Rwy Idg
TDZE **789**
Apt Elev **789**

RNAV (GPS) RWY 16

CARROLL COUNTY RGNL/JACK B POAGE FLD (DMW)


⚠

Baro-VNAV NA when using Frederick altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C (4°F) or above 54°C (130°F). When local altimeter setting not received, use Frederick altimeter setting and increase LPV DA to 1199 feet, LNAV/VNAV DA to 1307 feet, and all MDAs 120 feet; increase LPV all Cats visibility 1⁄8 SM, LNAV Cat C visibility 3⁄8 SM, and Circling Cat C visibility 1⁄2 SM. When VGSI inop, Straight-in/Circling Rwy 16 procedure NA at night. DME/DME RNP-0.3 NA. Visibility reduction by helicopters NA.

MISSED APPROACH:

Climb to 2200 direct NABIC then climbing left turn to 3000 on track 070° to FIGID and hold.

AWOS-3 121.25	POTOMAC APP CON 125.525 291.625	GCO 121.725	UNICOM 122.7 (CTAF) 0
-------------------------	---	-----------------------	---------------------------------

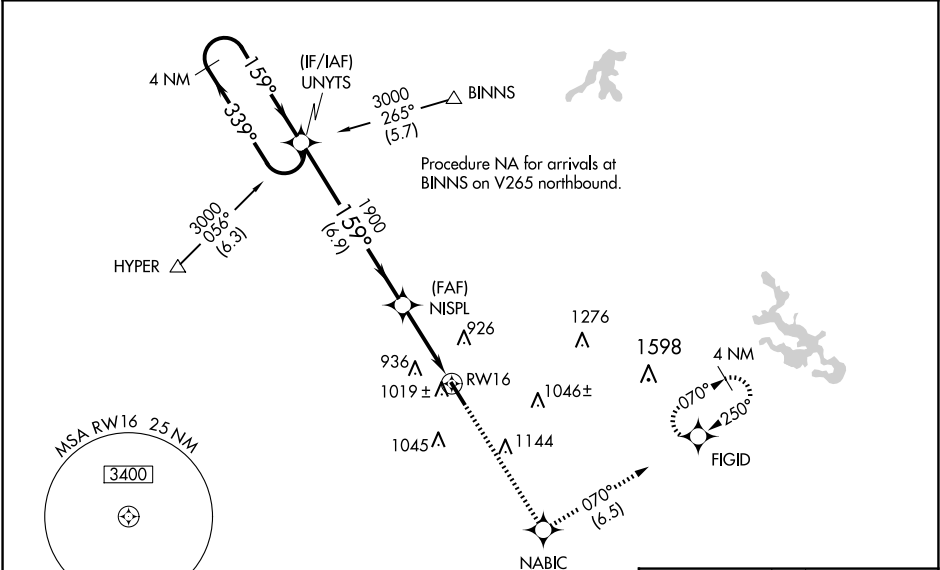

4 NM Holding Pattern

UNYTS

3000 ← 339°
159° →

GP 3.00°
TCH 45

2200

NABIC

3000

FIGID

↑

✳

↻ fr 070°

✳

1900

NISPL

1900

RW16

↖

↘

6.9 NM

3.4 NM

CATEGORY	A	B	C	D
LPV DA	1081-1	292 (300-1)		NA
LNAV/ VNAV DA	1189-1 3⁄8	400 (400-13⁄8)		NA
LNAV MDA	1280-1	491 (500-1)	1280-1 3⁄8 491 (500-13⁄8)	NA
CIRCLING	1320-1 531 (600-1)	1400-1 611 (700-1)	1500-2 711 (800-2)	NA

ELEV 789

TDZE 789

159°

91

5100 x 100

0.3% UP

34

REIL Rwys 16 and 34 0

MIRL Rwy 16-34 0