

WAAS CH 42521 W20A	APP CRS 202°	Rwy Ldg TDZE 772 Apt Elev 772
--	------------------------	---

RNAV (GPS) RWY 20
MID-CAROLINA RGNL (RUQ)



⚠ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16° C (4°F) or above 39°C (102°F). DME/DME RNP-0.3 NA. When local altimeter setting not received, use Lexington altimeter setting and increase all DA 37 feet and all MDA 40 feet, increase LNAV Cat C and D visibility ½ SM and Circling Cat C visibility ¼ SM and Circling Cat D ¼ SM. For inop ALS when using Lexington altimeter setting, increase LNAV Cat C and D visibility to 1¾ SM. VDP and Baro-VNAV NA when using Lexington altimeter setting. For inop ALS, increase LNAV/VNAV visibility to ¾ SM all Cats.

MALSR

AS

MISSED APPROACH:
Climb to 2100 then
climbing right turn to
3400 direct YIDPO
and hold.

AWOS-3 118.175	CHARLOTTE APP CON 128.325 307.8	UNICOM 122.725 (CTAF) 0
--------------------------	---	-----------------------------------

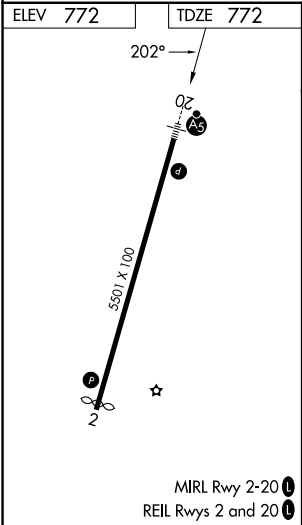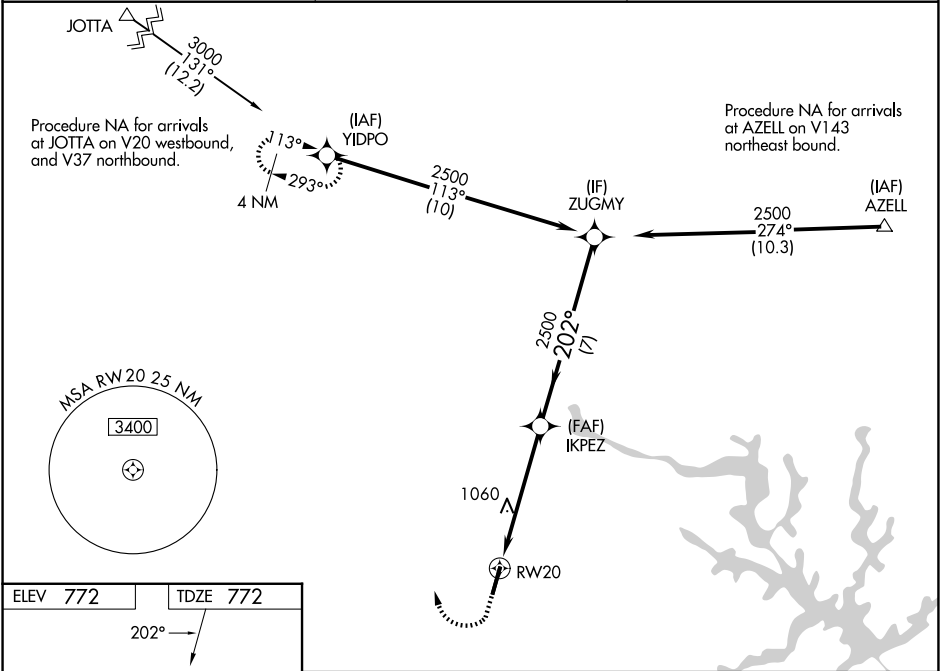

	2100	3400	YIDPO	
*LNAV only.				
			IKPEZ 2500	ZUGMY 2500
	1.7 NM		3.6 NM	7 NM
CATEGORY	A	B	C	D
LPV DA	972-½		200 (200-½)	
LNAV/VNAV DA	1032-½		260 (300-½)	
LNAV MDA	1360-½ 588 (600-½)		1360-1¼ 588 (600-1¼)	
CIRCLING	1360-1 588 (600-1)		1440-1¾ 668 (700-1¾) 1440-2 668 (700-2)	

SE-2, 02 OCT 2025 to 30 OCT 2025

SE-2, 02 OCT 2025 to 30 OCT 2025