


WAAS CH 56336 W12A	APP CRS 126°	Rwy Idg 4000 TDZE 541 Apt Elev 547
--	------------------------	---

RNAV (GPS) RWY 12
MUSCATINE MUNI (MUT)

▼ DME/DME RNP-0.3 NA. Helicopter visibility reduction below 1 SM NA.
▲ VDP and Baro-VNAV NA with Iowa City altimeter setting. When local altimeter setting not received, use Iowa City altimeter setting and increase all DA 76 feet and all MDA 80 feet, increase LPV, LNAV/VNAV all Cats visibility ½ mile. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C (4°F) or above 54°C (130°F).

MISSED APPROACH: Climb to 2700 direct HOVRA and hold.

AWOS-3P 120.625	QUAD CITY APP CON * 133.275 257.8	CLNC DEL 119.125	UNICOM 122.7 (CTAF) 0
---------------------------	---	----------------------------	---------------------------------

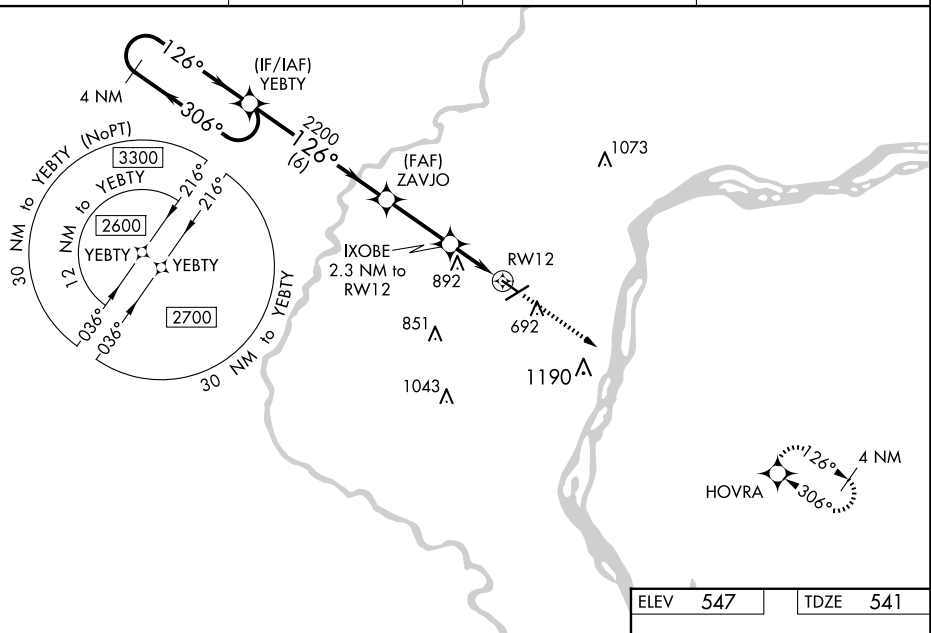

4 NM Holding Pattern

YEBTY

ZAVJO

IXOBE
2.3 NM to RW12

2700 HOVRA

*LNNAV only

GP 3.00°
TCH 44

2600

306°

126°

26°

2200

*1300

*1.8 NM to RW12

RW12

6 NM

2.8 NM

0.5

1.8

CATEGORY		A	B	C	D
LPV	DA	1207-2½	666 (700-2½)	NA	
RNAV/ VNAV	DA	1223-2½	682 (700-2½)	NA	
RNAV MDA		1140-1	599 (600-1)	NA	
	CIRCLING	1140-1 593 (600-1)	1200-1 653 (700-1)	NA	

