RNAV (GPS) RWY 18

SEDALIA RGNL (DMO)

WAAS CH 61133 W18A	APP CRS 179°	Rwy ldg 5500 TDZE 883 Apt Elev 910

DME/DME RNP-0.3 NA. When local altimeter setting not received, use Whiteman AFB altimeter setting: increase all DA 46 feet and LNAV/VNAV visibility ⅛ mile; increase all MDA 60 feet and Cats C and D visibilities ¼ mile. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C (3°F) or above 54°C (130°F). Baro-VNAV and VDP NA when using Whiteman AFB altimeter setting. Night Landing Rwy 5, 23 NA.

MISSED APPROACH: Climb to 2600 direct ZANGA and hold.

ASOS	WHITEMAN APP CON ★	UNICOM
120.525	127.45 284.0	122.8 (CTAF) L

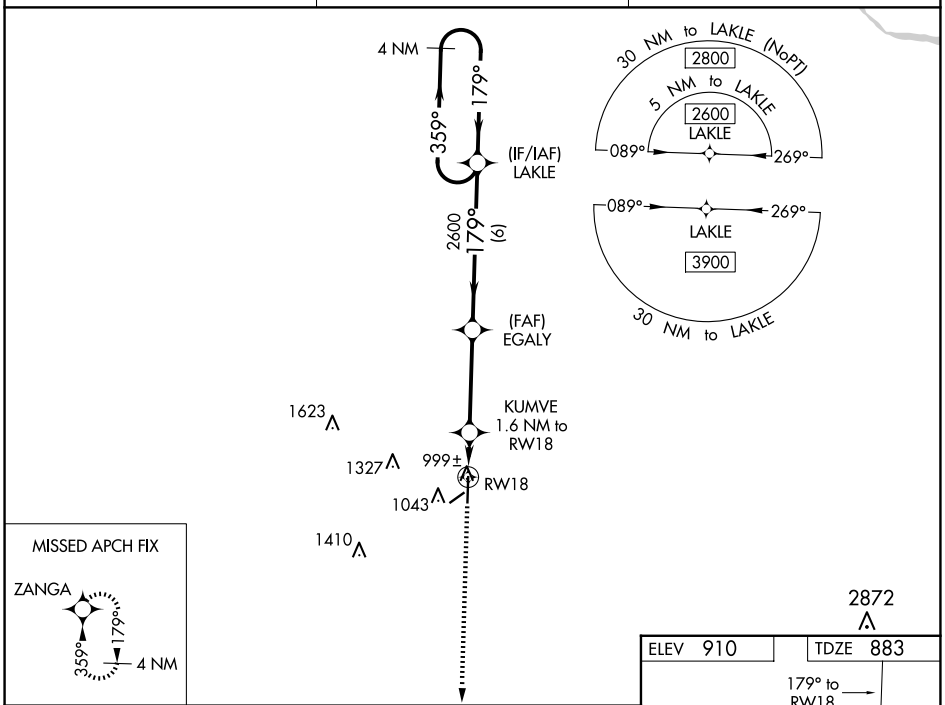

CATEGORY	A	B	C	D
LPV DA	1133-1		250 (300-1)	
LNAV/VNAV DA	1155-1		272 (300-1)	
LNAV MDA	1260-1		377 (400-1)	
C CIRCLING	1360-1 450 (500-1)	1460-1 550 (600-1)	1640-2 730 (800-2)	1640-2¼ 730 (800-2¼)

REIL Rwys 18 and 36 L
MIRL Rwys 18-36 and 5-23 L

NC-3, 02 OCT 2025 to 30 OCT 2025
NC-3, 02 OCT 2025 to 30 OCT 2025