

APP CRS  
**063°**

Rwy Ldg  
TDZE  
**20**

Apt Elev  
**20**

RNAV (GPS) RWY 6

APALACHICOLA RGNL-CLEVE RANDOLPH FLD (AAF)


▼

▲

Rwy 6 helicopter visibility reduction below 1 SM NA. When local altimeter setting not received, use ECP altimeter setting and increase all MDAs 140 feet and LNAV visibility Cat C/D ¾ SM, and Circling visibility Cat C/D ½ SM. Straight-in Rwy 6 NA at night, Circling Rwy 6, 18, 24, 32, 36 NA at night.

MISSED APPROACH: Climb to 3000 direct ONBOE and hold.

|                        |                                    |                                 |
|------------------------|------------------------------------|---------------------------------|
| ASOS<br><b>119.925</b> | TYNDALL APP CON ★<br><b>124.15</b> | UNICOM<br><b>122.8 (CTAF) 0</b> |
|------------------------|------------------------------------|---------------------------------|

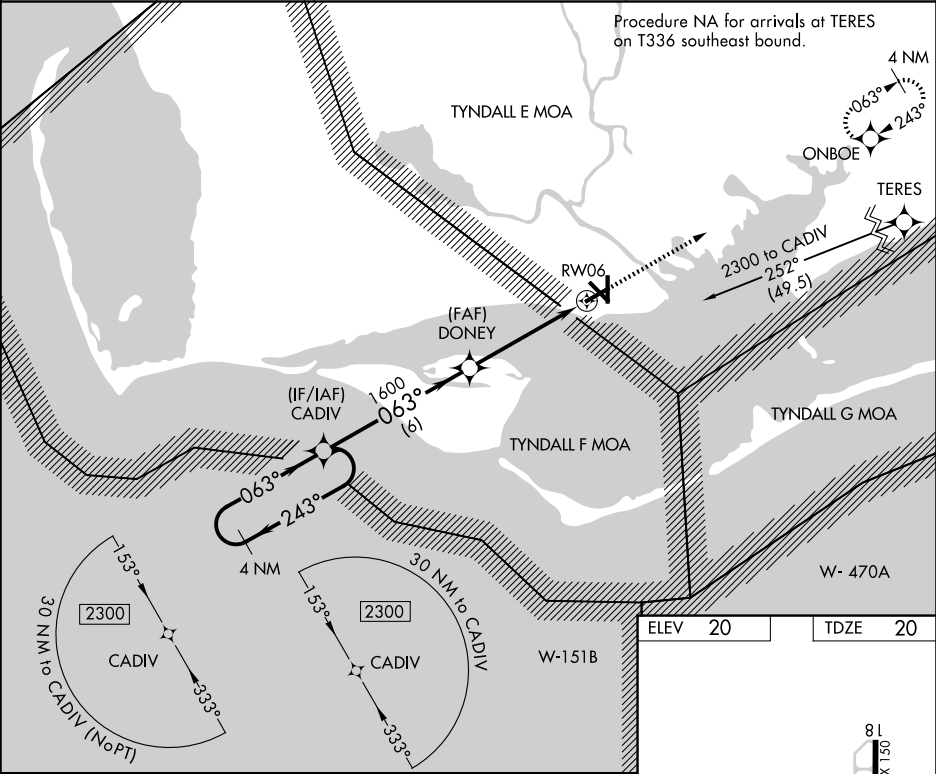

4 NM Holding Pattern

CADIV

2300 ← 243°

063° →

DONEY

3.00° TCH 40

RW06

1600

6 NM

4.8 NM

3000 ONBOE

↑

✧

| CATEGORY | A     | B           | C                      | D                    |
|----------|-------|-------------|------------------------|----------------------|
| LNAV MDA | 460-1 | 440 (500-1) | 460-1⅜                 | 440 (500-1⅜)         |
| CIRCLING | 520-1 | 500 (500-1) | 680-1¾<br>660 (700-1¾) | 680-2<br>660 (700-2) |

MIRL Rwy 6-24 and 14-32 0