

WAAS CH 82641 W17A	APP CRS 167°	Rwy Ldg TDZE Apt Elev	4000 722 722
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 17

FORT MADISON MUNI (F'SW)


RNP APCH - GPS.


⚠

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 54°C. Baro-VNAV and VDP NA when using BRL altimeter setting. When local altimeter setting not received, use BRL altimeter setting; increase LPV DA to 1004 feet; increase LNAV/VNAV DA to 1004 feet; increase all MDAs 40 feet and LNAV visibility Cats C and D ¼ SM, and Circling visibility Cat D ¼ SM.

MISSED APPROACH: Climb to 2600 direct DRIBS and hold.

AWOS-3 120.925	CHICAGO CENTER 135.6 316.1	UNICOM 122.8 (CTAF) 1
--------------------------	--------------------------------------	---------------------------------

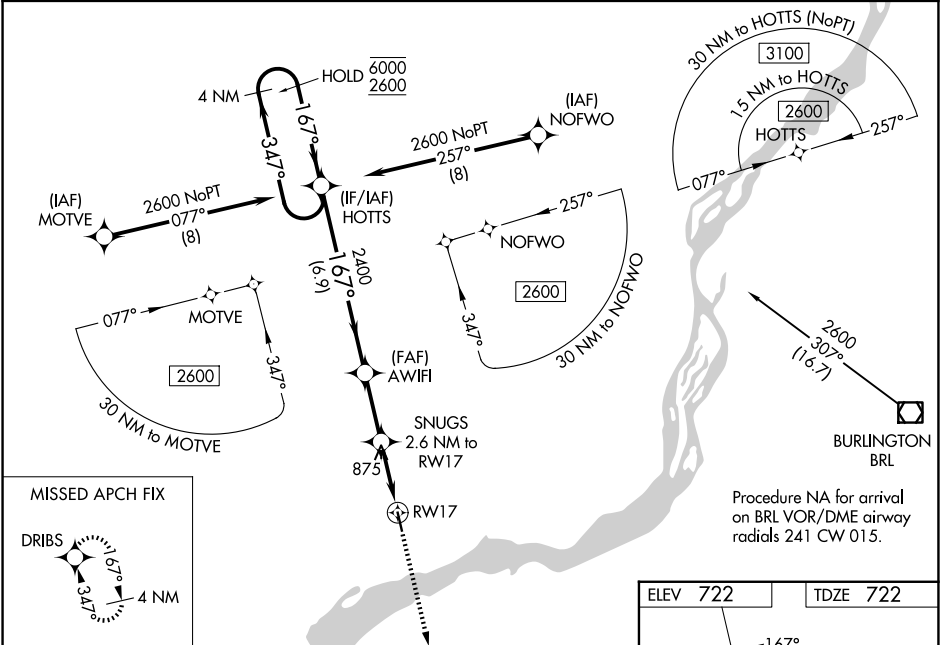

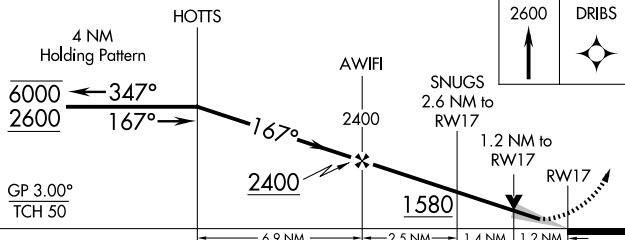 2600 DRIBS		HOTS		AWIFI		SNUGS 2.6 NM to RW17		RW17	
4 NM Holding Pattern				2400				1.2 NM to RW17	
6000 ← 347°				2400				1.2 NM to RW17	
2600 → 167°				1580				RW17	
GP 3.00° TCH 50		6.9 NM		2.5 NM		1.4 NM		1.2 NM	
CATEGORY	A	B	C	D					
LPV DA	972-1		250 (300-1)						
LNAV/ VNAV DA	972-1		250 (300-1)						
LNAV MDA	1140-1	418 (500-1)	1140-1½		418 (500-1½)				
CIRCLING	1200-1	478 (500-1)	1260-1½		1500-2½		538 (600-1½) 778 (800-2½)		

