

NDB TII 269	APP CRS 250°	Rwy Idg TDZE Apt Elev	4000 785 786
-----------------------	------------------------	-----------------------------	---


NDB RWY 24
SENECA COUNTY (16G)

▼ Rwy 24 helicopter visibility reduction below 1 SM NA. When local altimeter setting not received, use Findlay altimeter setting and increase all MDAs 60 feet, increase S-24 Cat C visibility 1/8 SM, and Circling Cat D visibility 1/4 SM. Straight-in Rwy 24 NA at night, Circling Rwy 24 NA at night.

⚠ NA

MISSED APPROACH: Climb to 2400 then right turn direct TII NDB and hold.

AWOS-3 127.175	FDY ASOS 132.85	TOLEDO APP CON 120.8 317.55	UNICOM 123.0 (CTAF) 0
--------------------------	---------------------------	---------------------------------------	---------------------------------

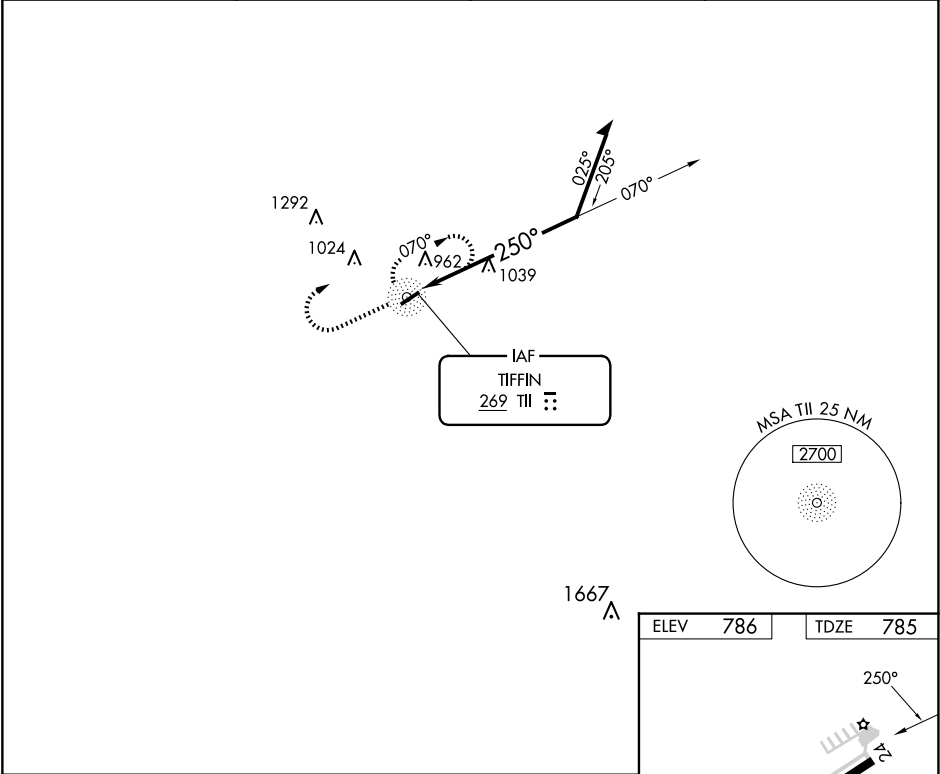

2400

↑

TII

○

TII NDB

070°

2400

250°

Remain within 10 NM

CATEGORY	A	B	C	D
S-24	1460-1	675 (700-1)	1460-1 7/8 675 (700-1 7/8)	1460-2 675 (700-2)
CIRCLING	1460-1	674 (700-1)	1460-2 674 (700-2)	1560-2 1/2 774 (800-2 1/2)

ELEV 786

TDZE 785

250°

24

4000 X.75

MIRL Rwy 6-24 0

REIL Rwys 6 and 24 0

EC-2, 02 OCT 2025 to 30 OCT 2025

EC-2, 02 OCT 2025 to 30 OCT 2025