

APP CRS

Rwy Ldg

4002

021°

TDZE

765

Apt Elev

765

RNAV (GPS) RWY 2

CENTERVILLE MUNI (GHM)

▼

NA

Obtain local altimeter setting on CTAF, when not received, use Columbia/Mount Pleasant altimeter setting and increase all MDA 80 feet. Increase LNAV Cats C and D visibility ¾ mile and Circling Cat D ¼ mile. DME/DME RNP-0.3 NA. Procedure NA at night. Helicopter visibility reduction below 1 SM NA.


MISSED APPROACH:
Climb to 3000 direct ZAVOS and hold.

NASHVILLE APP CON

119.35 372.0

UNICOM

122.8 (CTAF) 0

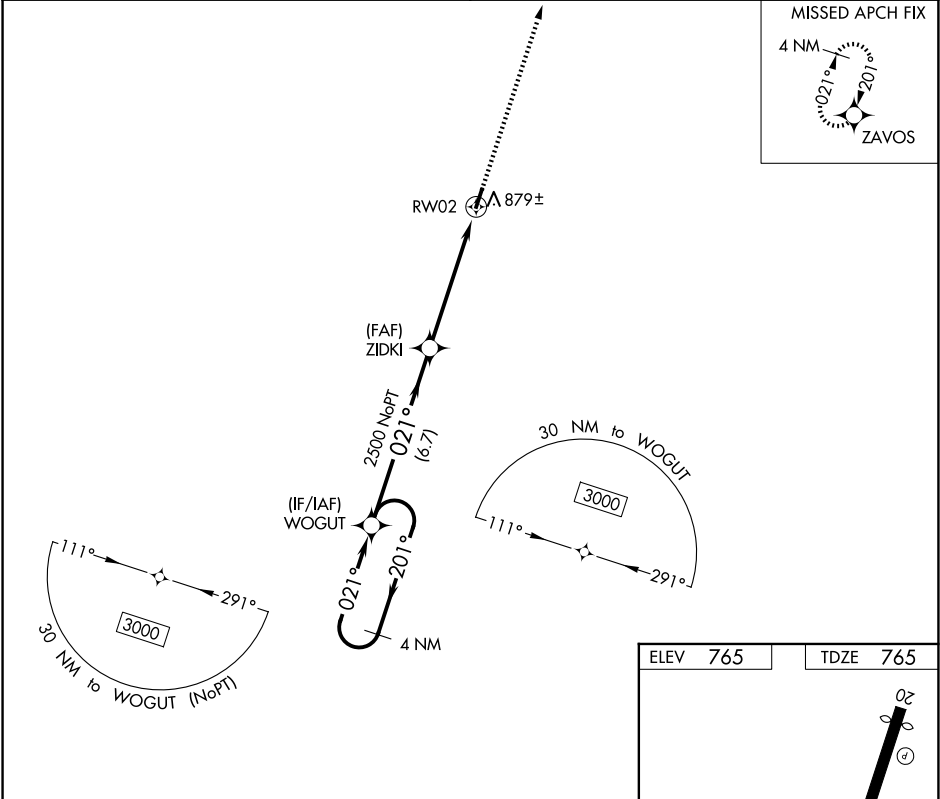

4 NM

Holding Pattern WOGUT

3000

201°

021°

VGSI and descent angles not coincident (VGSI Angle 4.00/TCH 43).

3000

ZAVOS

021°

ZIDKI

2500

3.00°

TCH 40

RW02

5.3 NM

6.7 NM

CATEGORY	A	B	C	D
LNAV MDA	1140-1 375 (400-1)			
CIRCLING	1260-1	495 (500-1)	1280-1½ 515 (600-1½)	1520-2½ 755 (800-2½)

ELEV 765

TDZE 765

4002 X 75

021°

MIRL Rwy 2-20

REIL Rws 2 and 20

SE-1, 02 OCT 2025 to 30 OCT 2025

SE-1, 02 OCT 2025 to 30 OCT 2025